

WAAS CH 40433 W23A	APP CRS 234°	Rwy Ldg TDZE Apt Elev	3601 3204 3204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23


RAPID CITY RGNL (RAP)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA when using Ellsworth AFB altimeter setting.

MISSED APPROACH: Climbing left turn to 5300 direct EWEBU and hold.

ASOS 118.525	ELLSWORTH APP CON ★ 119.5 259.1	RAPID CITY TOWER ★ 125.85 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

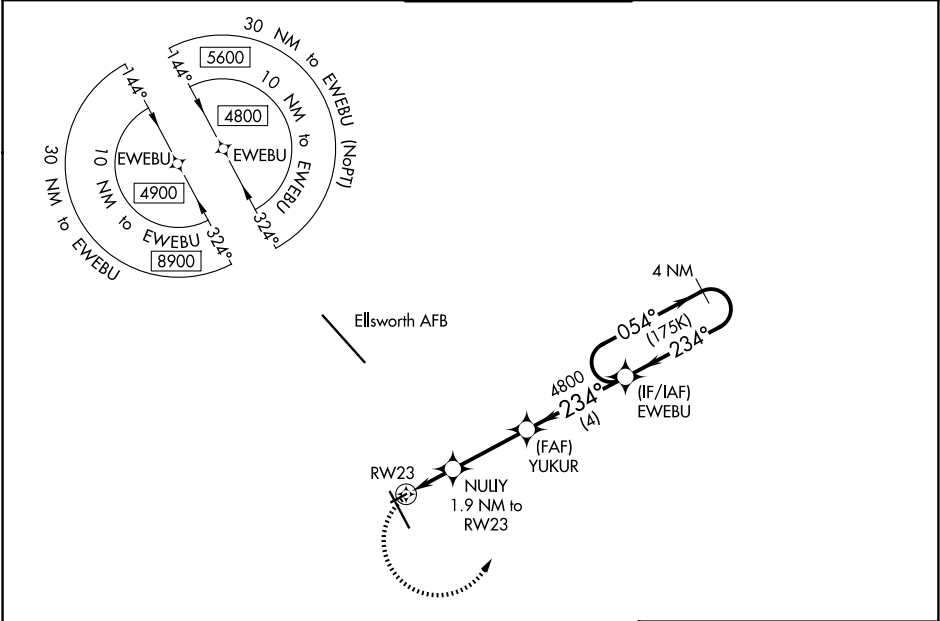

5300

EWEBU

*1 NM only.

*1 NM to RW23

NULIY

1.9 NM to RW23

YUKUR

4800

EWEBU

4800

4 NM Holding Pattern

234°

054°

234°

3820*

GP 3.00°

TCH 38

1 NM

0.9 NM

3 NM

4 NM

CATEGORY	A	B	C	D
LPV DA	3454-1	250 (300-1)		NA
LNAV/VNAV DA	3454-1	250 (300-1)		NA
LNAV MDA	3560-1	356 (400-1)		NA
CIRCLING	3660-1 456 (500-1)	3840-1 636 (700-1)		NA

ELEV 3204

D

TDZE 3204

234°

054°

234°

0.6% DOWN

0.8% UP

0.5% UP

3601 X.75

3601 X.150

32

TWR

REIL Rwy 14

MIRL Rwy 5-23

HIRL Rwy 14-32