
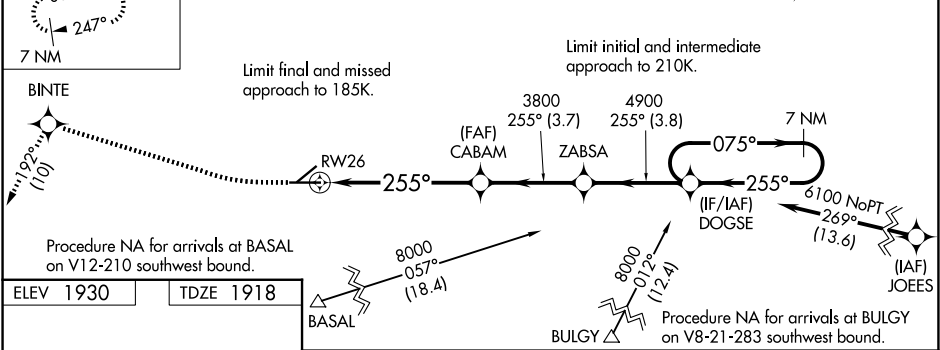


WAAS CH 72813 W26A	APP CRS 255°	Rwy Ldg TDZE Apt Elev	6402 1918 1930
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 26
BARSTOW-DAGGETT (DAG)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Circling NA for Cat D south of Rwy 8-26. Rwy 26 helicopter visibility reduction below ¾ SM NA. ⚠ #Missed approach requires a minimum climb of 220 feet per NM to 8000.	MISSED APPROACH: Climb to 2600 on heading 255° then climb to 8000 direct BINTE and on track 192° to NULMN and hold, continue climb-in-hold to 8000.
--	---

ASOS 132.175	LOS ANGELES CENTER 132.5 284.7	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

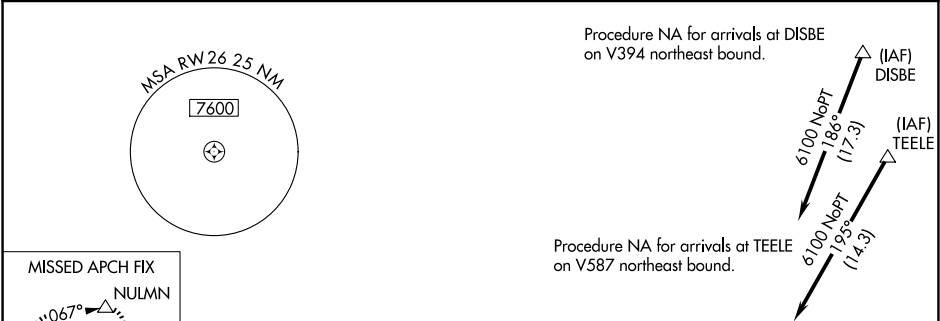

2600

hdg 255°

8000

BINTE

fr 192°

NULMN

ZABSA

DOGSE

7 NM Holding Pattern

* LNAV only

CABAM

3800

255°

075°

6100

GP 3.00°

TCH 50

RW26

* 1.8 NM to RW26

3800

4900

1.8 NM

4 NM

3.7 NM

3.8 NM

CATEGORY	A	B	C	D
LPV DA#	2222-1 304 (300-1)			
LPV DA	2343-1 3/8 425 (500-1 3/8)			
LNAV/VNAV DA	2389-1 5/8 471 (500-1 3/8)			
LNAV MDA	2540-1	622 (700-1)	2540-1 3/4	622 (700-1 3/4)
CIRCLING	2640-1 710 (800-1)	2860-1 1/4 930 (1000-1 1/4)	3500-3	1570 (1600-3)

MIRL Rwy 4-22 and 8-26