
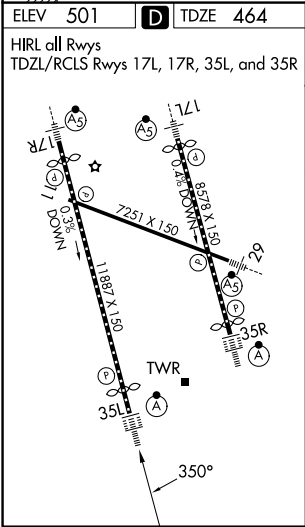



WAAS CH 86203 W35A	APP CRS 350°	Rwy Ldg 10000 TDZE 464 Apt Elev 501
--	------------------------	--

RNAV (GPS) Y RWY 35L
LOUISVILLE MUHAMMAD ALI INTL (SDF')

RNP APCH - GPS. ⚠ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM.	ALSF-2 	MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct DAMEN and hold.
--	------------	---

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

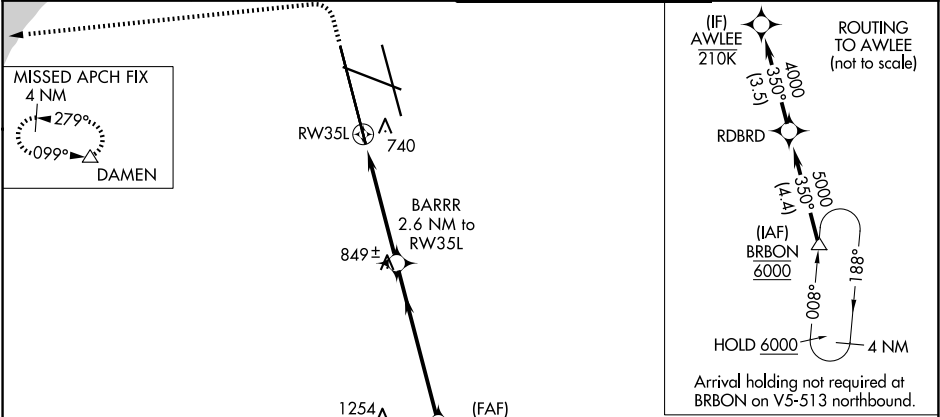

ELEV 501	D	TDZE 464
HIRL all Rwys TDZL/RCLS Rwys 17L, 17R, 35L, and 35R		
R-3704 A & B		
DAMEN		
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		
BARRR 2.6 NM to RW35L		
RW35L		
CRDNL		
KNOX		
AWLEE		
GP 3.00° TCH 59		
CATEGORY		
LPV DA		
LNAV/VNAV DA		
LNAV MDA		
CIRCLING		