

WAAS CH 58122 W22A	APP CRS 220°	Rwy Ldg TDZE Apt Elev	7001 378 378
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 22
SCHENECTADY COUNTY (SCH)

NA

Circling Rwy 10 NA at night. Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Albany altimeter setting. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 661, LNAV/VNAV DA to 749, and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat C and D and Circling Cat C visibility ½ mile.

MISSED APPROACH:
Climb to 3700 direct FOSRA and hold.

AWOS-3 119.275	ALBANY APP CON 132.825 263.075	SCHENECTADY TOWER ★ 121.3 (CTAF) 321.1	GND CON 121.9	UNICOM 122.95
--------------------------	--	--	-------------------------	-------------------------

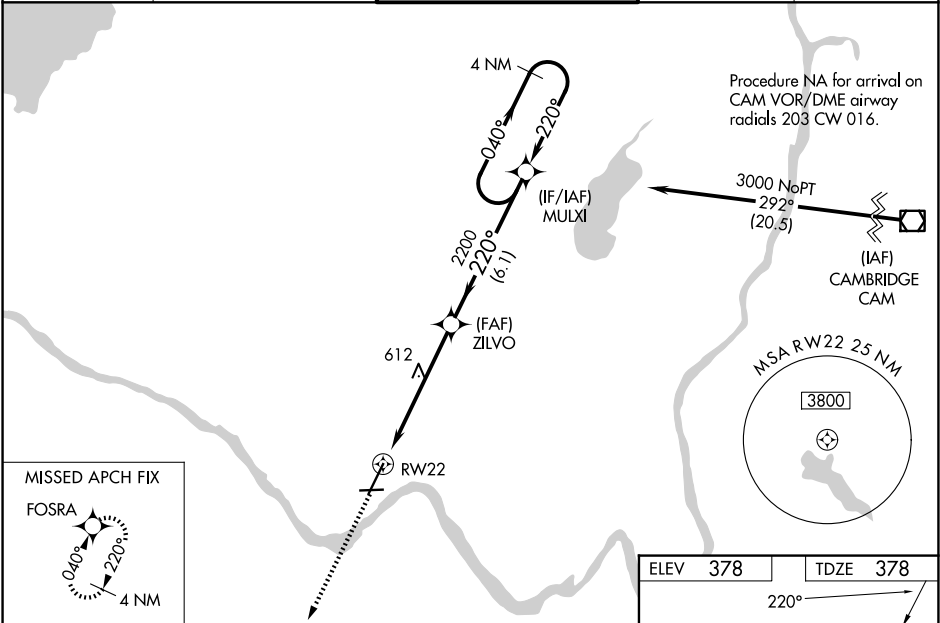

3700 FOSRA

* LNAV only.

* 1.5 NM to RWY 22

RWY 22

ZILVO 2200

MULXI 2200

4 NM Holding Pattern


040° → 3000

← 220°

GP 3.00° TCH 50

1.5 NM 4.1 NM 6.1 NM

CATEGORY	A	B	C	D
LPV DA		628-¾	250 (300-¾)	
LNAV/VNAV DA		716-1⅞	338 (400-1⅞)	
LNAV MDA	900-1	522 (600-1)	900-1½	522 (600-1½)
CIRCLING	900-1 522 (600-1)	940-1 562 (600-1)	1120-2¼ 742 (800-2¼)	1320-3 942 (1000-3)

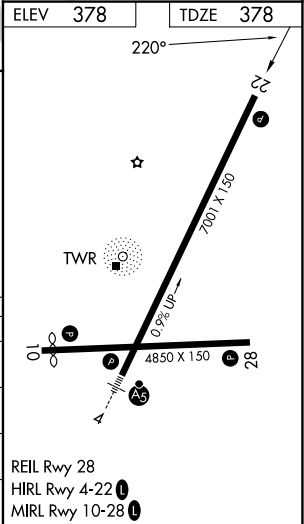

NE-2, 22 JAN 2026 to 19 FEB 2026

NE-2, 22 JAN 2026 to 19 FEB 2026