
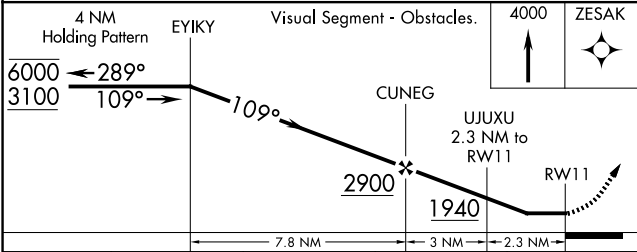


WAAS CH 97633 W11A	APP CRS 109°	Rwy Idg TDZE 1172 Apt Elev 1174
--	------------------------	---

RNAV (GPS) RWY 11

GEAUGA COUNTY (7G8)

RNP APCH - GPS.		MISSED APPROACH: Climb to 4000 direct ZESAK and hold, continue climb-in-hold 4000.
Rwy 11 helicopter visibility reduction below 1 SM NA. Use Youngstown/Warren altimeter setting; when not received, use Cuyahoga County altimeter setting and increase all MDAs 40 feet and increase LNAV Cat C and Circling Cat C visibilities ¼ SM. Straight-in Rwy 11 NA at night, Circling Rwy 11 NA at night.		
YNG ASOS 123.75	CLEVELAND APP CON 125.35 346.325	UNICOM 123.0 (CTAF) 0

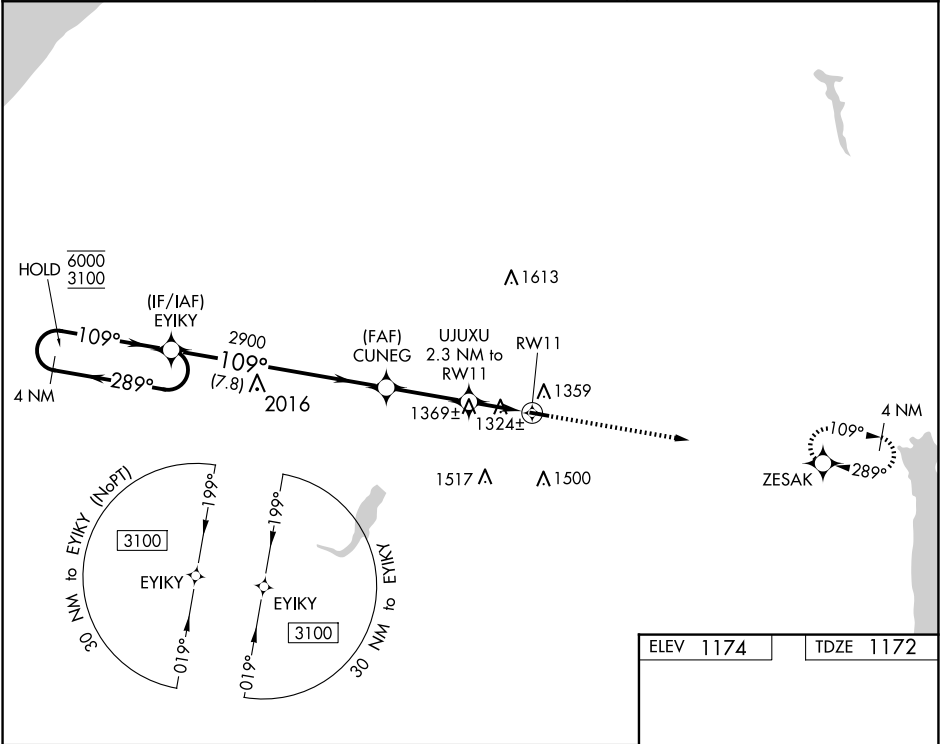

ELEV 1174	TDZE 1172
-----------	-----------

The diagram illustrates the geometry of runway 11/29. A horizontal line represents the runway, with '11' at the left end and '29' at the right end. Above the runway, the dimensions '3500 X 65' are written. An arrow points to the runway from the upper left, labeled '109°'. Below the runway, an arrow points to the right, labeled '0.5% UP'. A star symbol is located on the runway between the '11' and '29' markings. A small circle with the number '65' is at the right end of the runway.

REIL Rwys 11 and 29 **0**

MIRL Rwy 11-29 **0**

CATEGORY	A	B	C	D
LP MDA	1640-1 468 (500-1)	1640-1 468 (500-1)	1640-1 468 (500-1)	NA
LNAV MDA	1680-1 508 (600-1)	1680-1 508 (600-1)	1680-1 508 (600-1)	NA
CIRCLING	1760-1 586 (600-1)	1760-1 586 (600-1)	1900-2 726 (800-2)	NA

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026