

WAAS CH 99743 W06A	APP CRS 060°	Rwy Idg 5509 TDZE 861 Apt Elev 882
--	------------------------	---

RNAV (GPS) RWY 6


ATLANTA SPEEDWAY (HMP)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 2600 direct YEBUT and hold.

AWOS-3 124.825	ATLANTA APP CON 128.575 343.675	CLNC DEL 128.575 343.675	UNICOM 122.725 (CTAF)
--------------------------	---	------------------------------------	---------------------------------

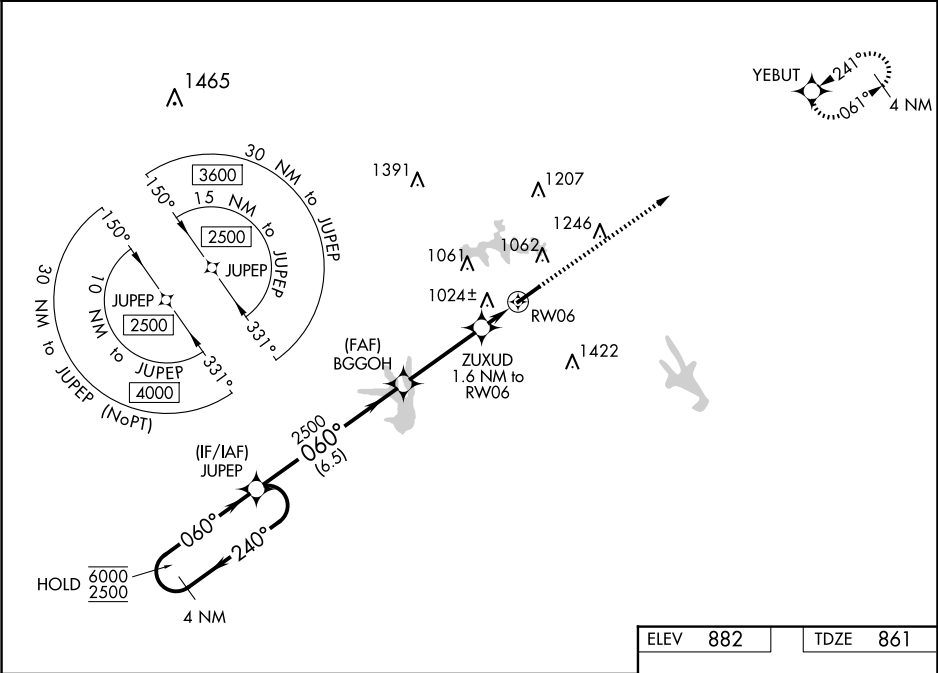

4 NM Holding Pattern

GP 3.00° TCH 44

6000
2500

←240°

060°→

2500

060°

2500

2600

YEBUT

JUPEP

BGGOH

ZUXUD

RW06

6.5 NM

3.4 NM

1.6 NM

CATEGORY	A	B	C	D
LPV DA	1061-¾ 200 (200-¾)			
LNAV/VNAV DA	1185-1 324 (400-1)			
LNAV MDA	1280-1	419 (400-1)	1280-1½	419 (400-1½)
CIRCLING	1380-1 498 (500-1)	1400-1 518 (600-1)	1700-2½ 818 (900-2½)	1740-2¾ 858 (900-2¾)

ELEV 882 TDZE 861

5509 X 100

060°

0.5% UP

REIL Rwy 6 and 24
MIRL Rwy 6-24