

WAAS CH <b>93719</b> <b>W36A</b>	APP CRS <b>357°</b>	Rwy Ldg TDZE <b>25</b> Apt Elev <b>25</b>	<b>9503</b>
--	------------------------	---	-------------

# RNAV (GPS) RWY 36

MYRTLE BEACH INTL (MYR)

RNP APCH - GPS.



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Inop table does not apply to LPV. For inop ALS, increase LNAV Cats C, D, and E visibility to 1 3/8 SM.

MALSF




MISSED APPROACH: Climb to 2000 direct PEDEE and hold.

ATIS <b>123.925</b>	MYRTLE BEACH APP CON * (171° - 321°) <b>127.4 257.95</b> (322° - 170°) <b>119.2 350.3</b>	MYRTLE BEACH TOWER * <b>128.45</b> (CTAF) <b>259.3</b>	GND CON <b>120.3 275.8</b>	CLNC DEL <b>120.3</b>	UNICOM <b>122.95</b>
------------------------	---	---	-------------------------------	--------------------------	-------------------------

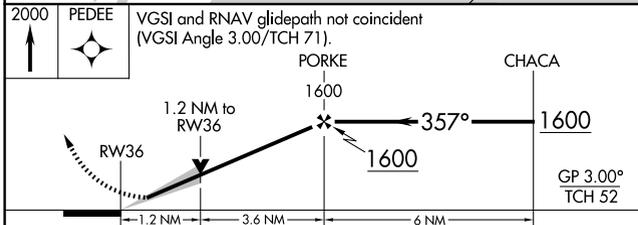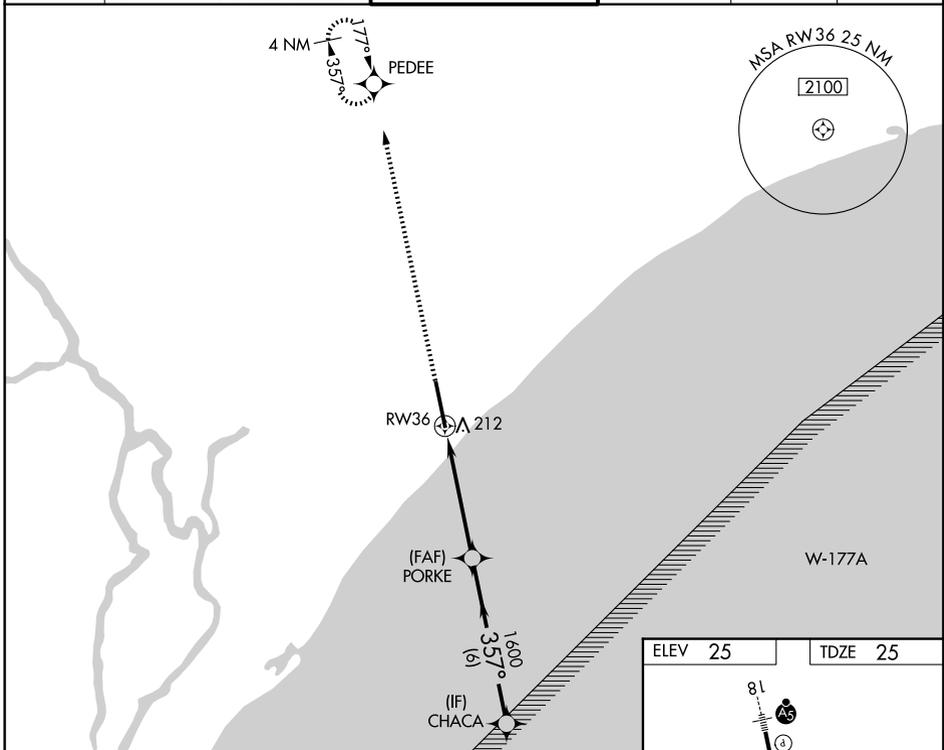

CATEGORY	A	B	C	D	E
LPV DA	225/40 200 (200-3/4)				
LNAV/VNAV DA	374/45 349 (400-7/8)				
LNAV MDA	480/40	455 (500-3/4)	480/55 455 (500-1)		
CIRCLING	560-1	535 (600-1)	700-2 675 (700-2)	700-2 1/4 675 (700-2 1/4)	700-2 1/2 675 (700-2 1/2)

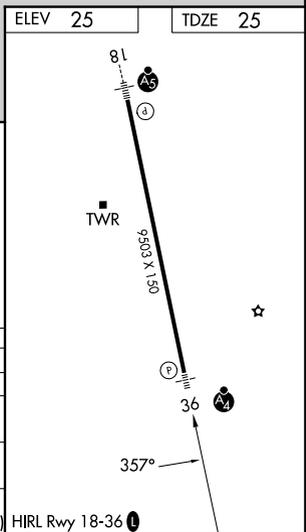

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026