WAAS CH 82613 W27A	APP CRS 276°	Rwy ldg 5000 TDZE 753 Apt Elev 755

RNAV (GPS) RWY 27
MOUNT PLEASANT MUNI (MOP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alma altimeter setting and increase all DA 42 feet and all MDA 60 feet, increase LPV, LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibilities ¼ mile. Baro-VNAV and VDP NA when using Alma altimeter setting. Circling NA to Rwys 5 and 23.

MISSED APPROACH: Climb to 3000 direct COPTI and via 186° track direct INDAF and via 132° track to ELMME and hold.

AWOS-3	GREAT LAKES APP CON*	UNICOM
133.025	126.45 235.625	123.0 (CTAF) L

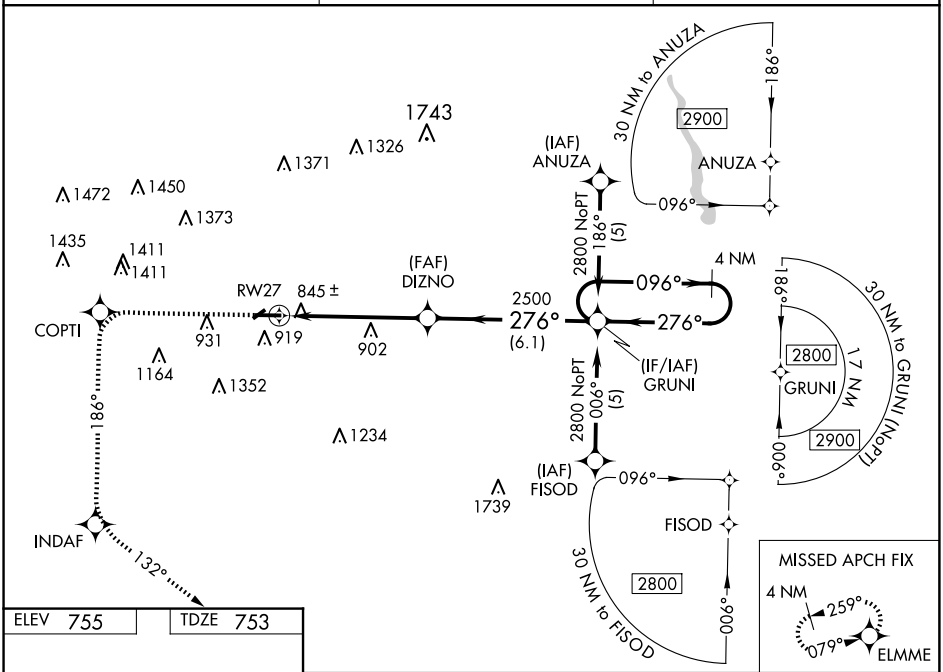

ELEV 755 TDZE 753

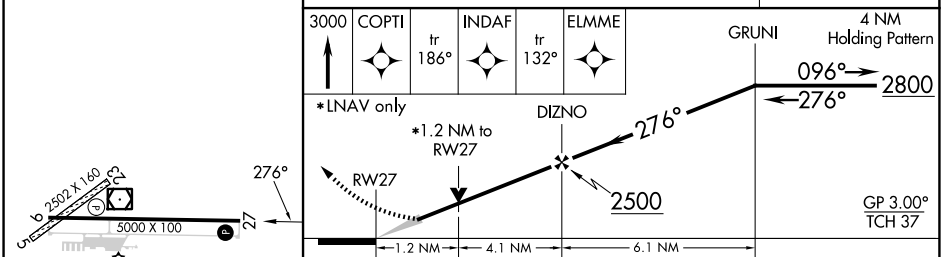

CATEGORY	A	B	C	D
LPV DA	1099-1¼ 346 (400-1¼)			
LNAV/VNAV DA	1201-1½ 448 (500-1½)			
LNAV MDA	1160-1 407 (500-1)		1160-1¼ 407 (500-1¼)	
CIRCLING	1240-1 485 (500-1)		1400-1¾ 645 (700-1¾)	1700-3 945 (1000-3)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

EC-1, 19 FEB 2026 to 19 MAR 2026