

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>97726</b><br><b>W26A</b> | APP CRS<br><b>267°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>9000</b><br><b>96</b><br><b>96</b> |
|--|------------------------|-----------------------------|---------------------------------------|

# RNAV (GPS) Z RWY 26R



GEORGE BUSH INTCNTL/HOUSTON (IAH)

**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1¼, and LNAV Cat C/D/E visibility to 1½. DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 26L and Rwy 27. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

**ALSF-2**

**MISSED APPROACH:** Climb to 600 then climbing right turn to 3000 direct PEPBI and hold.

|                         |  |                                       |                           |
|-------------------------|--|---------------------------------------|---------------------------|
| D-ATIS<br><b>124.05</b> | HOUSTON APP CON<br><b>120.05 379.1 E</b><br><b>124.35 316.15 W</b> | HOUSTON TOWER<br><b>120.725 290.2</b> | GND CON<br><b>118.575</b> |
|-------------------------|--|---------------------------------------|---------------------------|

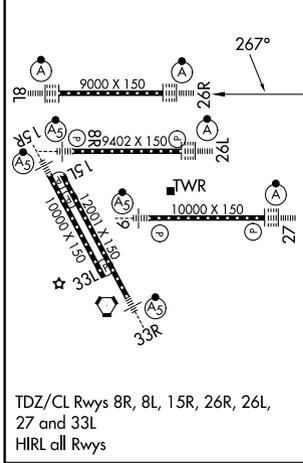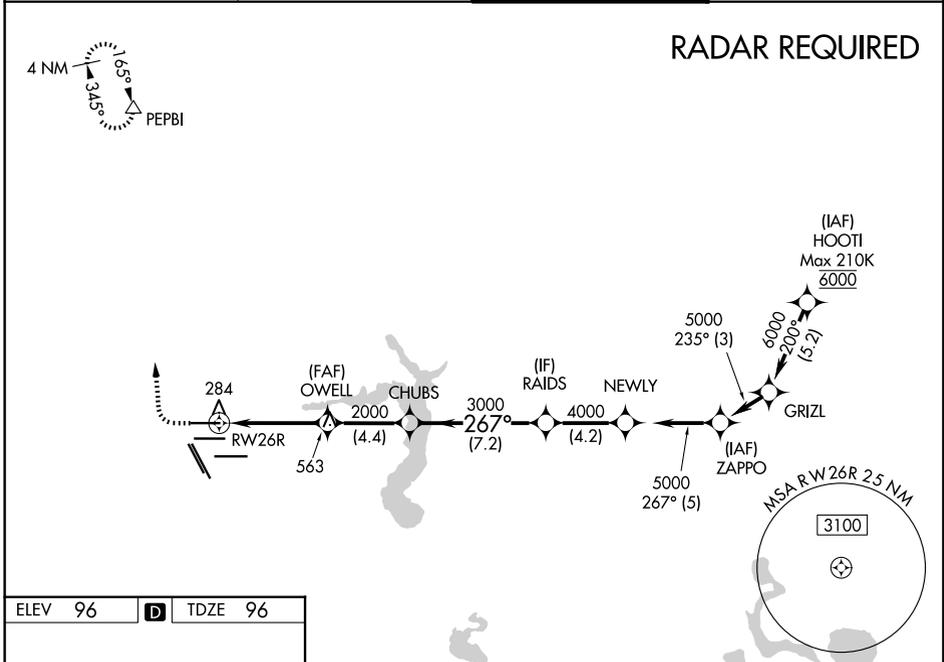

|              |                    |             |             |        |             |       |      |  |
|--------------|--------------------|-------------|-------------|--------|-------------|-------|------|--|
|              | 600                | 3000        | PEPBI       |        |             |       |      |  |
|              | ↑                  | ↷           | △           |        |             |       |      |  |
| *LNAV only   |                    |             |             |        |             |       |      |  |
|              | RWY 26R            | OWELL       | CHUBS       | RAIDS  | NEWLY       | ZAPPO |      |  |
|              | 2000               | 2000        | 3000        | 4000   | 5000        | 5000  | 5000 |  |
|              | *1.4 NM to RWY 26R |             |             |        |             |       |      |  |
|              | 1.4                | 4.4         | 4.4         | 7.2    | 4.2         | 5     |      |  |
| CATEGORY     | A                  | B           | C           | D      | E           |       |      |  |
| LPV DA       |                    | 296/18      | 200 (200-½) |        |             |       |      |  |
| LNAV/VNAV DA |                    | 496/42      | 400 (400-¾) |        |             |       |      |  |
| LNAV MDA     | 600/24             | 504 (600-½) |             | 600/55 | 504 (600-1) |       |      |  |

GP 3.00° TCH 59

SC-5, 19 FEB 2026 to 19 MAR 2026

SC-5, 19 FEB 2026 to 19 MAR 2026