| VORTAC SQS | APP CRS | Rwy Ldg | 5011 |
|---|---|---|---|
| 114.7 | 076° | TDZE | 149 |
| Chan 94 | | Apt Elev | 162 |

# VOR RWY 5

GREENWOOD-LEFLORE (GWO)

When local altimeter setting not received, use Greenville altimeter setting and increase all MDAs 120 feet and visibility S-5 Cat B and Circling Cat A/B ¼ SM, and S-5 Cat C/D and Circling Cat C ½ SM and COTMU Fix Minimums S-5 Cat C/D ¼ SM and Circling Cat C½ SM. Rwy 5 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 5 NA at night, Circling Rwy 5, 23 NA at night.

MISSED APPROACH: Climbing right turn to 2500 direct SQS VORTAC and hold.

| ASOS | MEMPHIS CENTER | GREENWOOD TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 119.975 | 132.5 259.1 | 118.35 (CTAF) L 367.6 | 125.55 373.4 | 122.95 |

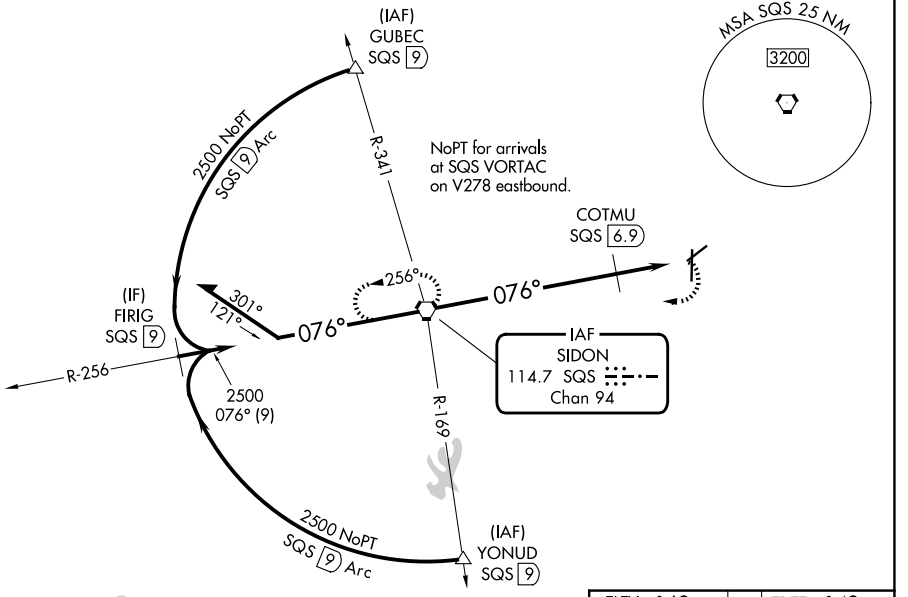


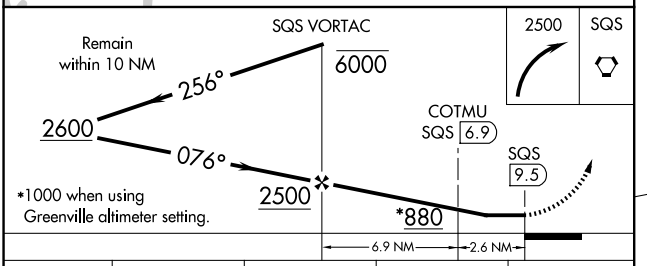


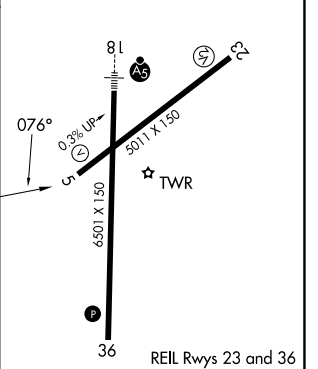


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-5 | 880-1 | 731 (800-1) | 880-2 | 731 (800-2) |
| CIRCLING | 880-1 | 718 (800-1) | 1000-2½ 838 (900-2½) | 1120-3 958 (1000-3) |
| COTMU FIX MINIMUMS (DME REQUIRED) | | | | |
| S-5 | 600-1 | 451 (500-1) | 600-1⅜ | 451 (500-1⅜) |
| CIRCLING | 760-1 | 598 (600-1) | 1000-2½ 838 (900-2½) | 1120-3 958 (1000-3) |

FAF to MAP 9.5 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 9:30 | 6:20 | 4:45 | 3:48 | 3:10 |



SC-4, 11 JUN 2026 to 09 JUL 2026
SC-4, 11 JUN 2026 to 09 JUL 2026