WAAS	APP CRS	Rwy Idg	4400
CH 62812	170°	TDZE	769
W17A		Apt Elev	769

RNAV (GPS) RWY 17

HANNIBAL RGNL (HAE)

T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Quincy altimeter setting; increase all DA 41 feet, all MDA 60 feet, increase LNAV Cat C visibility ¼ SM and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using Quincy altimeter setting.

MISSED APPROACH: Climb to 3000 direct PARCK and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
120.775	126.225 317.775	122.8 (CTAF) L

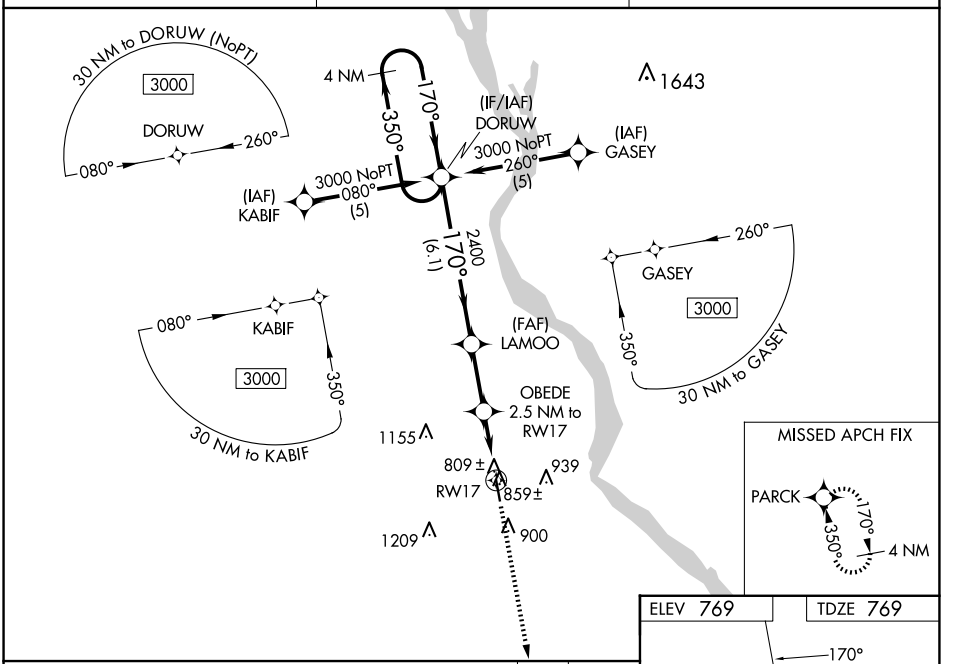

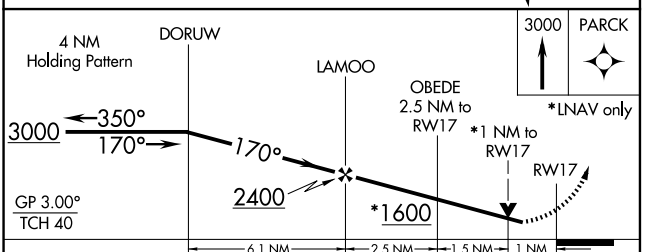

CATEGORY	A	B	C	D
LPV DA	1019-1 250 (300-1)			NA
LNAV/VNAV DA	1079-1¼ 310 (400-1¼)			NA
LNAV MDA	1120-1 351 (400-1)			NA
CIRCLING	1260-1 491 (500-1)		1640-2½ 871 (900-2½)	NA

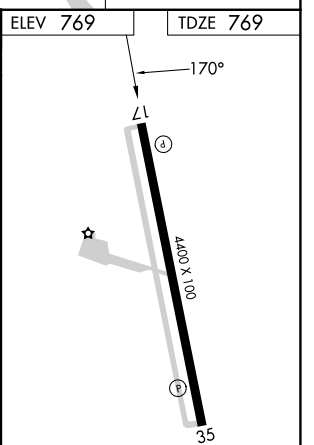

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

NC-3, 11 JUN 2026 to 09 JUL 2026
NC-3, 11 JUN 2026 to 09 JUL 2026