

WAAS CH <b>50308</b> <b>W24A</b>	APP CRS <b>241°</b>	Rwy Ldg TDZE Apt Elev	<b>5000</b> <b>666</b> <b>666</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 24

PONTIAC MUNI (PNT)

RNP APCH - GPS.


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BMI altimeter setting. When local altimeter setting not received, use BMI altimeter setting: increase LPV DA to 1014 feet; increase LNAV/VNAV DA to 1237 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM.

**MISSED APPROACH:**  
Climb to 3000 direct  
BUCLA and hold.


AWOS-3  
**119.675**

CHICAGO CENTER  
**123.75 259.1**

UNICOM  
**123.075 (CTAF) 0**





Procedure NA for arrivals at  
MOTIF on V156 westbound.

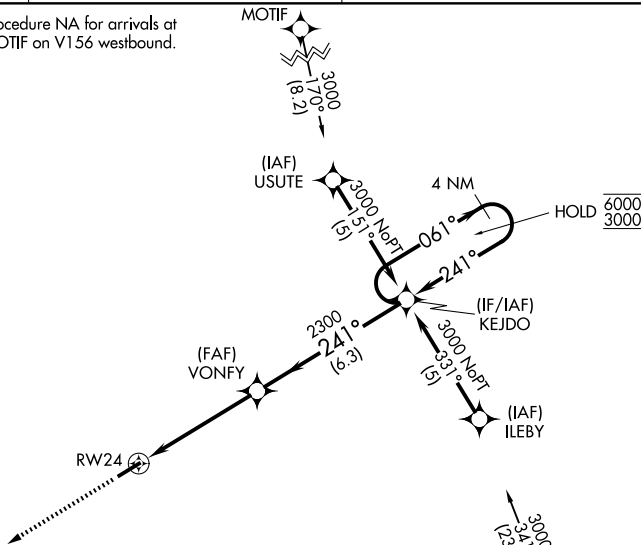

Procedure NA for arrivals on RBS VOR/DME  
airway radials 351 CW 006.



ELEV 666 TDZE 666

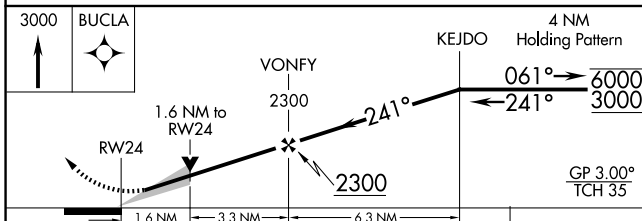

CATEGORY	A	B	C	D
LPV DA	916-1		250 (300-1)	NA
LNAV/VNAV DA	1139-1 3/8		473 (500-1 3/8)	NA
LNAV MDA	1220-1	554 (600-1)	1220-1 5/8 554 (600-1 3/8)	NA
CIRCLING	1220-1	554 (600-1)	1320-1 3/4 654 (700-1 3/4)	NA

MIRL Rwy 6-24 0

EC-3, 11 JUN 2026 to 09 JUL 2026

EC-3, 11 JUN 2026 to 09 JUL 2026