

ATLANTA, GEORGIA

AL-26 (FAA)

26190

WAAS CH 61299 W28A	APP CRS 275°	Rwy Ldg 9000 TDZE 998 Apt Elev 1026
--	------------------------	--

RNAV (GPS) Y RWY 28


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2



MISSED APPROACH:
Climb to 1500 then
climbing left turn to
3000 direct SCARR
and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER						GND CON			
119.65	134.725 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
		119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

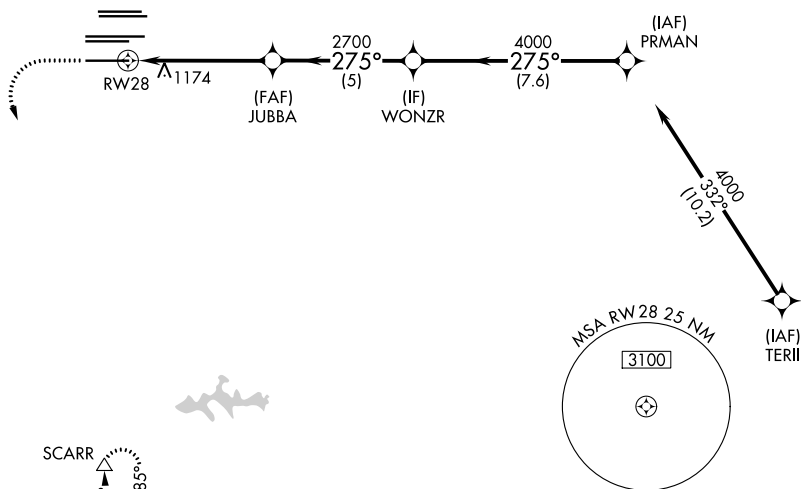

RADAR REQUIRED

Diagram illustrating a flight path with waypoints JUBBA, WONZR, and PRMAN. The path starts at a point 1.2 NM from RW28, then proceeds to JUBBA (2700), WONZR (4000), and PRMAN (4000). The distance between JUBBA and WONZR is 4 NM, and between WONZR and PRMAN is 5 NM. The total distance from the start point to PRMAN is 7.6 NM. The diagram also shows a 275° heading from WONZR to PRMAN and a 2700 altitude at JUBBA. A note indicates a 1.2 NM distance to RW28.

CATEGORY	A	B	C	D
LPV DA	1198/18 200 (200-½)			
RNAV/VNAV DA	1250/24 252 (300-½)			
RNAV MDA	1440/24	442 (500-½)	1440/45	442 (500-¾)

[illegible]

ATLANTA, GEORGIA
Amdt 4A 12OCT17

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

33°38'N-84°26'W

RNAV (GPS) Y RWY 28

SE-4, 09 JUL 2026 to 06 AUG 2026