


WAAS CH 86918 W09A	APP CRS 087°	Rwy Ldg TDZE Apt Elev	4000 967 979
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9
BLUE GRASS (LEX)


⚠ Baro-VNAV NA when using Frankfort altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Frankfort altimeter setting. When local altimeter setting not received, use Frankfort altimeter setting: increase LPV DA to 1279 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1421 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct REBAA and hold.

ATIS 126.3	LEXINGTON APP CON 120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	LEXINGTON TOWER 119.1 257.8	GND CON 121.9
----------------------	---	---------------------------------------	-------------------------

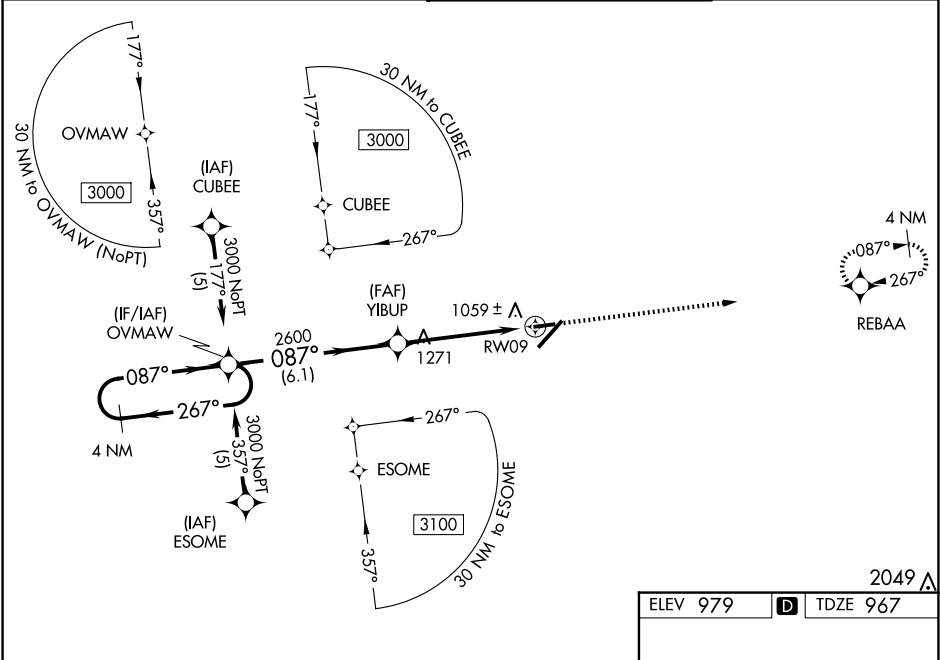

4 NM Holding Pattern		OVMAW		3000 ↑		REBAA ✦	
3000 ← 267° 087° →		YIBUP 2600		*1.7 NM to RW09		*LNAV only.	
GP 3.00° TCH 43		2600		RW09			
		6.1 NM		3.3 NM		1.7 NM	
CATEGORY	A	B	C	D			
LPV DA	1217-1			250 (300-1)			
LNAV/ VNAV DA	1359-1½			392 (400-1½)			
LNAV MDA	1540-1	573 (600-1)	1540-1½ 573 (600-1½)	1540-1¾ 573 (600-1¾)			
CIRCLING	1540-1	561 (600-1)	1540-1½ 561 (600-1½)	1600-2 621 (700-2)			

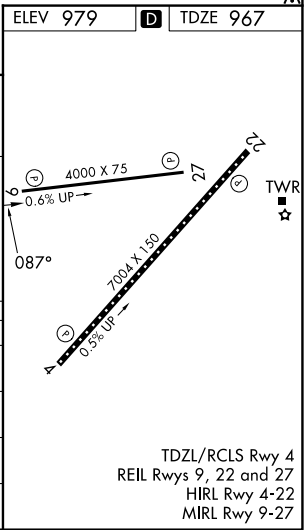

TDZL/RCLS Rwy 4
REIL Rws 9, 22 and 27
HIRL Rwy 4-22
MIRL Rwy 9-27