
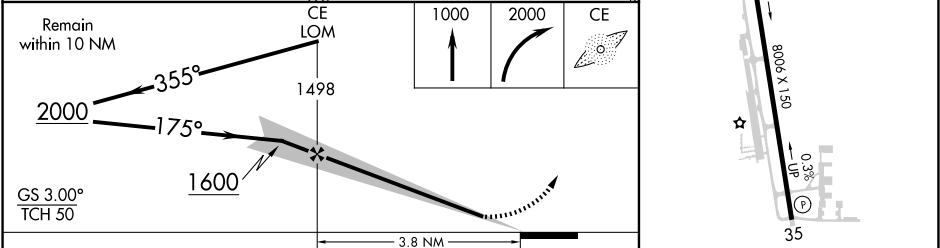
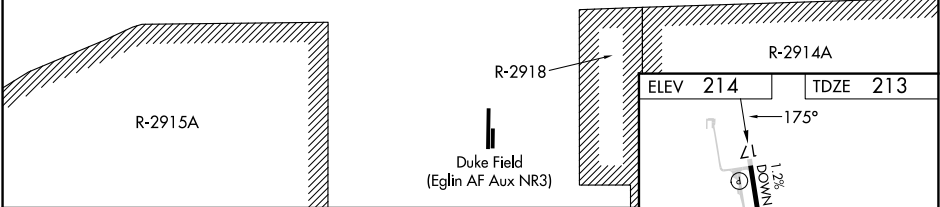


LOC I-CEW 111.9	APP CRS 175°	Rwy Ldg 8006 TDZE 213 Apt Elev 214	ILS or LOC RWY 17 BOB SIKES(CEW)
--------------------	-----------------	---	-------------------------------------

ADF required.	MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 direct KOBRA LOM and hold.
NA Circling NA for Cat D West of Rwy 17-35. Autopilot coupled approach NA. When local altimeter setting not received, use Eglin AFB altimeter setting and increase S-ILS 17 DA to 472 and all MDA 60 feet, increase S-LOC 17 Cat C/D and Circling Cat D visibility ¼ SM.	

ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 123.075 (CTAF) 0
-----------------	--------------------------------	----------------------------

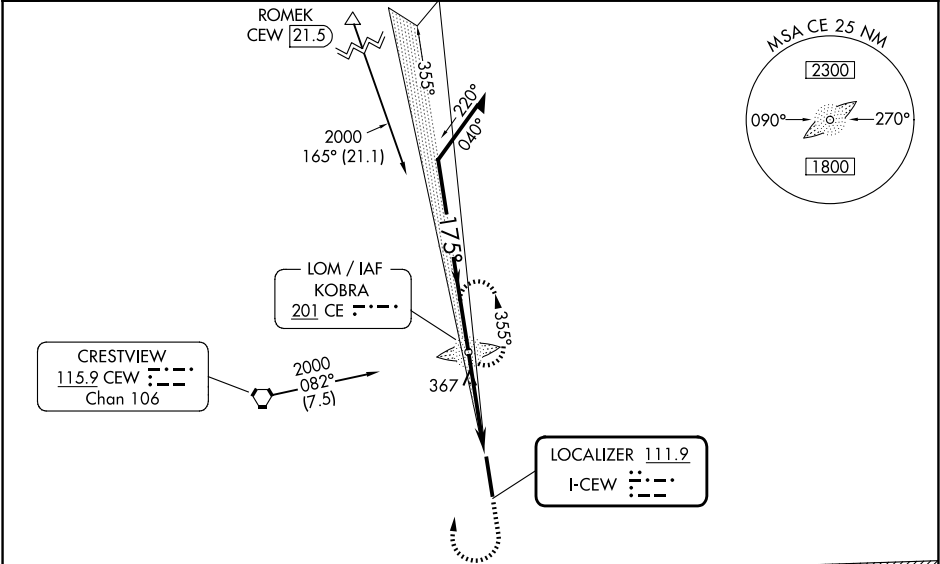

CATEGORY	A	B	C	D
S-ILS 17	413-¾ 200 (200-¾)			
S-LOC 17	620-1	407 (500-1)	620-1⅛	407 (500-1⅛)
CIRCLING	700-1	486 (500-1)	820-1¾ 606 (700-1¾)	840-2 626 (700-2)

HIRL Rwy 17-35 0					
FAF to MAP 3.8 NM					
Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16