


VOR/DME DJB	APP CRS	Rwy Ldg	N/A
113.6	070°	TDZE	N/A
Chan 83		Apt Elev	793

VOR-A
LORAIN COUNTY RGNL (LPR)

⚠ When local altimeter setting not received, use Cleveland-Hopkins Intl altimeter setting and increase all MDA 40 feet, increase circling Cat C/D visibility ¼ mile.

MISSED APPROACH: Climbing left turn to 3000 via heading 029° and DJB VOR/DME R-029 direct OTOCE INT and hold.

ASOS 118.925	CLEVELAND APP CON 125.35 346.325	CLNC DEL 125.7	UNICOM 122.7 (CTAF) 0
-----------------	-------------------------------------	-------------------	--------------------------

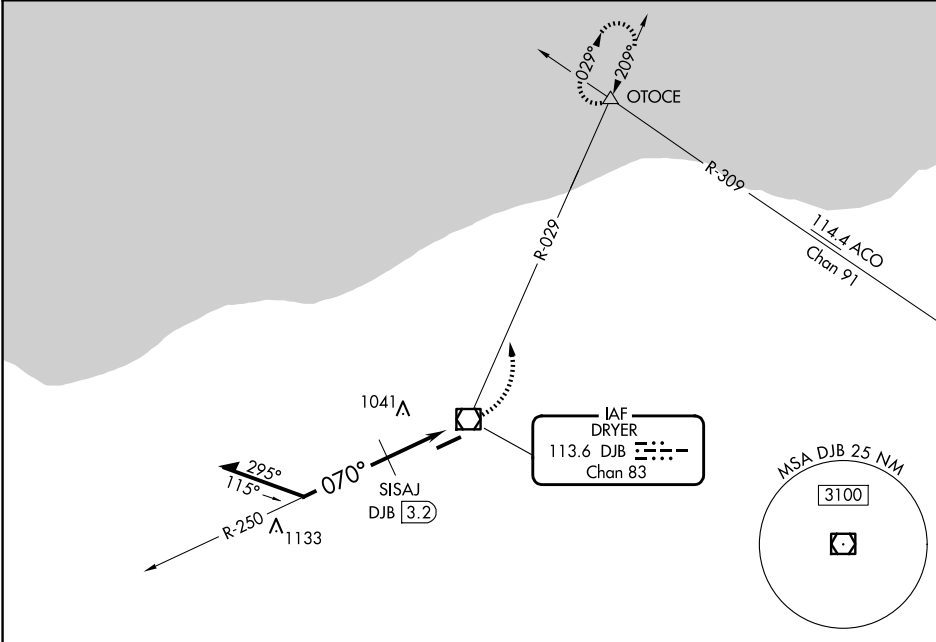

Remain within 10 NM

2400

250°

070°

SISAJ DJB 3.2

*1440

3.2 NM

3000

hdg 029°

DJB R-029

OTOCE

*1480 when using Cleveland-Hopkins altimeter setting.

ELEV 793

5002 X 100

070°

REIL Rwy 25 0

HIRL Rwy 7-25 0

CATEGORY	A	B	C	D
CIRCLING	1440-1	647 (700-1)	1440-1¾ 647 (700-1¾)	1440-2 647 (700-2)
SISAJ DME MINIMUMS				
CIRCLING	1300-1 507 (600-1)	1360-1 567 (600-1)	1420-1¾ 627 (700-1¾)	1420-2 627 (700-2)

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026