

WAAS CH 90327 W32A	APP CRS 315°	Rwy Ldg TDZE 665 Apt Elev 678
--	------------------------	---



RNAV (GPS) RWY 32

CHEROKEE COUNTY (JSO)

⚠ Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase DA 118 feet, increase all MDA 120 feet and LPV, LNAV/VNAV visibility all Cats ¼ mile, LNAV and Circling Cat C visibility ⅜ mile. When VGSI inop, Straight-in/Circling Rwy 32 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3100 direct WOSUL and hold.

AWOS-3PT 119.075	LONGVIEW APP CON ★ 128.75 379.15	UNICOM 122.7 (CTAF) ①
----------------------------	--	---------------------------------

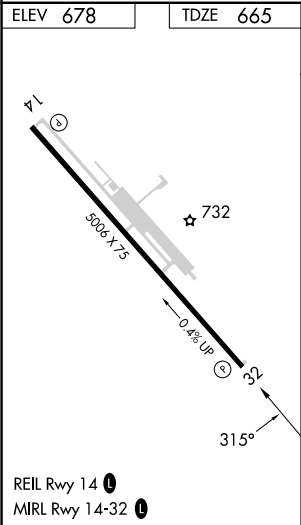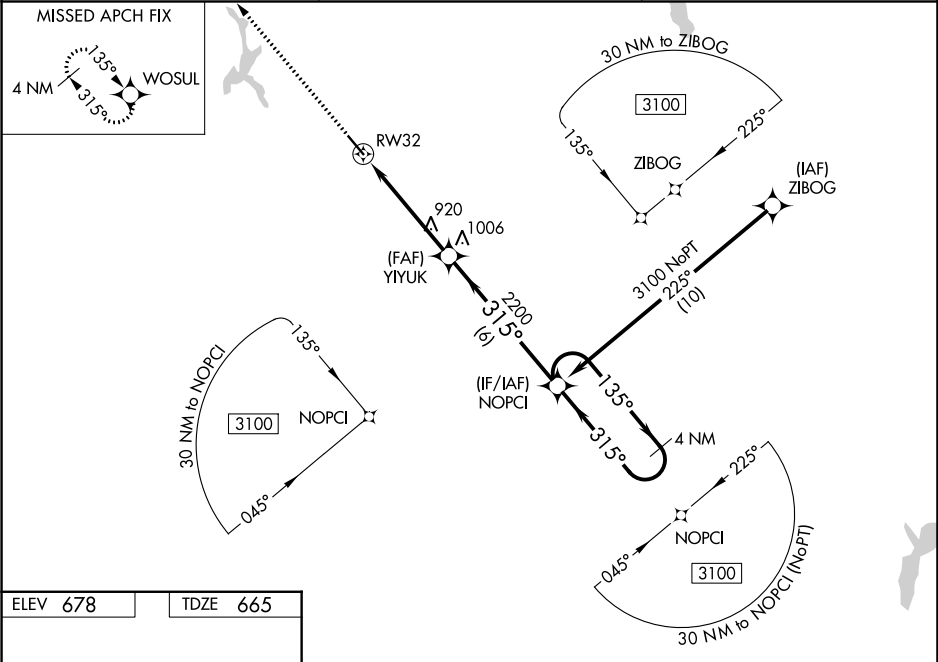

3100	WOSUL			
		YIYUK	NOPCI	4 NM Holding Pattern
		2200	315°	3100
		2200	315°	GP 3.00° TCH 30
		4.8 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA	915-1	250 (300-1)		NA
LNAV/VNAV DA	915-1	250 (300-1)		NA
LNAV MDA	1220-1	555 (600-1)	1220-1½ 555 (600-1½)	NA
CIRCLING	1220-1	542 (600-1)	1280-1¾ 602 (700-1¾)	NA