

WAAS CH 56421 W10A	APP CRS 102°	Rwy Ldg 4184 TDZE 430 Apt Elev 437
--	------------------------	---

RNAV (GPS) RWY 10

MACON DOWNTOWN (MAC)


▼

NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Middle Georgia altimeter setting, when not received, use Robbins AFB altimeter setting and increase LPV DA to 726 feet, increase LNAV/VNAV DA to 833 feet and increase all MDA 20 feet.

MISSED APPROACH:
Climb to 3000 direct
JOBRA and hold.

MCN ASOS 120.775	ATLANTA APP CON ★ 124.2 279.6	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

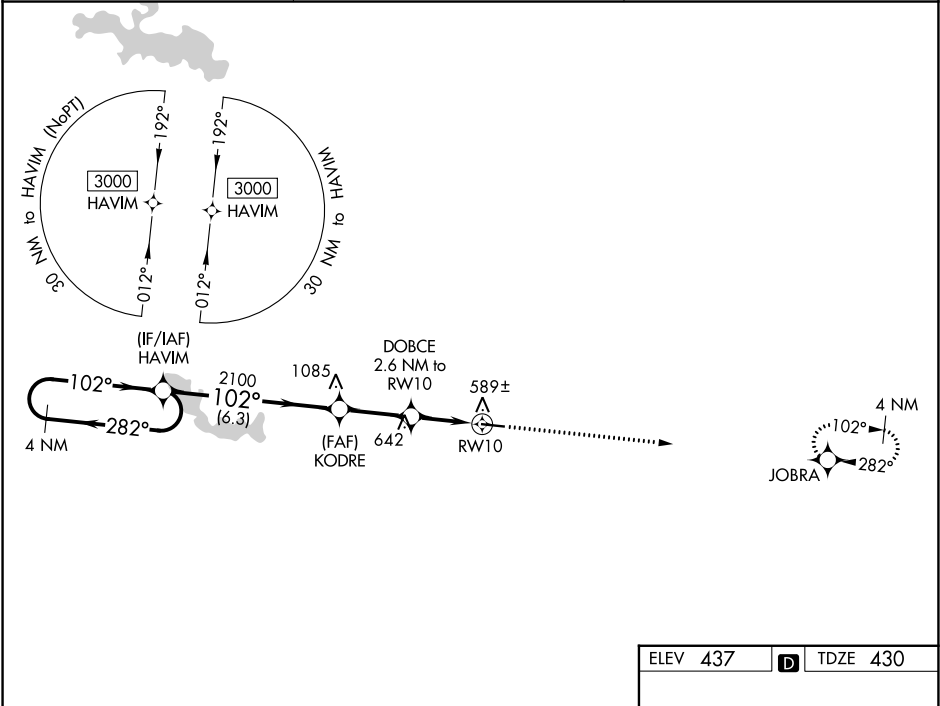

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).		3000	JOBRA
3000		282°		102°	102°
GP 3.00°		TCH 40		*LNAV only.	
2100		6.3 NM		2.6 NM	
2100		2.6 NM		2.6 NM	
*1280		2.6 NM		2.6 NM	
RWY 10					
CATEGORY	A	B	C	D	
LPV DA	712-1		282 (300-1)		
LNAV/VNAV DA	819-1 ³ / ₈		389 (400-1 ³ / ₈)		
LNAV MDA	880-1	450 (500-1)	880-1 ³ / ₈	450 (500-1 ³ / ₈)	
CIRCLING	1200-1	763 (800-1)	1320-2 ³ / ₄ 883 (900-2 ³ / ₄)	1480-3 1043 (1100-3)	

