


LOC I-AGC	APP CRS	Rwy Ldg	6501
109.1	281°	TDZE	1251
		Apt Elev	1252

ILS or LOC RWY 28

ALLEGHENY COUNTY (AGC)

RADAR required.		MALS	MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct AGC VOR/DME and hold, continue climb-in-hold to 3000.
Autopilot coupled approach NA below 1900. Circling Rwy 13 NA at night. For inop ALS, increase S-LOC Cats C and D visibility to RVR 6000. Inop table does not apply to S-ILS 28.		A4	

ATIS 120.55	PITTSBURGH APP CON 119.35 285.575	ALLEGHENY TOWER 121.1 239.0	GND CON 121.7
----------------	--------------------------------------	--------------------------------	------------------

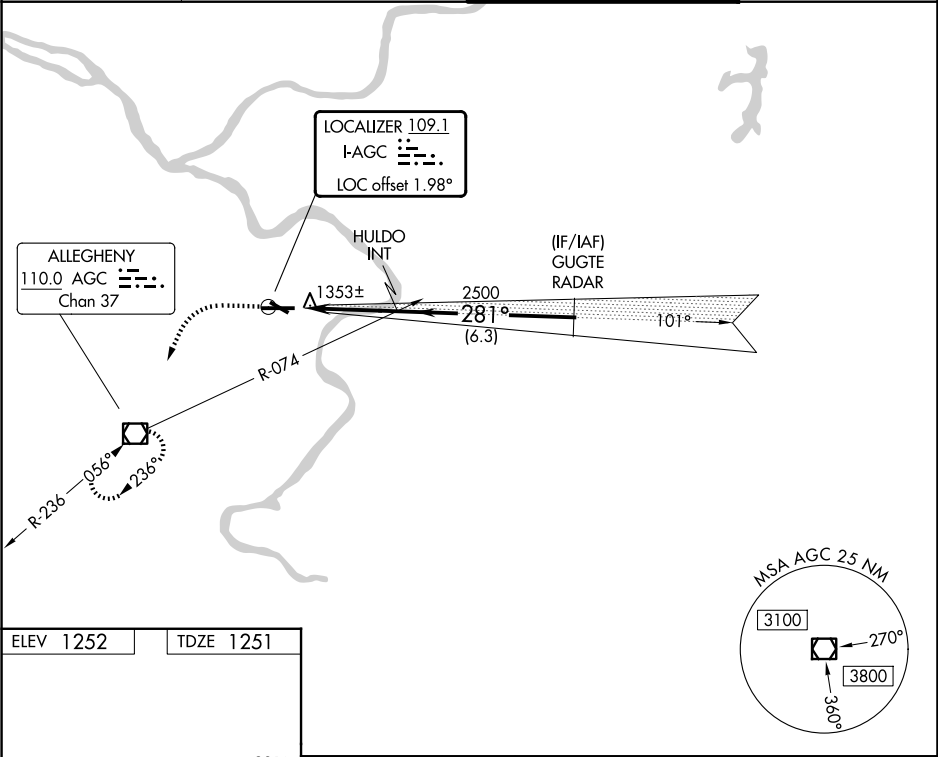

ELEV 1252	TDZE 1251
281° 2000 3000 AGC 310 325 X 100 37 TWR	
REIL Rws 10, 13, and 31 HIRL Rws 10-28 and 13-31	
FAF to MAP 3.8 NM	
Knots	60 90 120 150 180
Min:Sec	3:48 2:32 1:54 1:31 1:16

2000

↑

3000

↘

AGC

HULDO INT

2500

281°

3000

GS 3.00°

TCH 51

3.8 NM

6.3 NM

GUGTE RADAR

CATEGORY	A	B	C	D
S-ILS 28	1501/40		250 (300-¾)	
S-LOC 28	1660/40	409 (500-¾)	1660/50	409 (500-1)
CIRCLING	1720-1	468 (500-1)	1980-2 728 (800-2)	1980-2¼ 728 (800-2¼)

NE-4, 03 SEP 2026 to 01 OCT 2026

NE-4, 03 SEP 2026 to 01 OCT 2026