

25331

RNAV (GPS) RWY 8

LUBBOCK PRESTON SMITH INTL (LBB)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA
A below -10°C or above 52°C.

ATIS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	LUBBOCK TOWER 120.5 239.3	GND CON 121.9 348.6
---	--	--	--

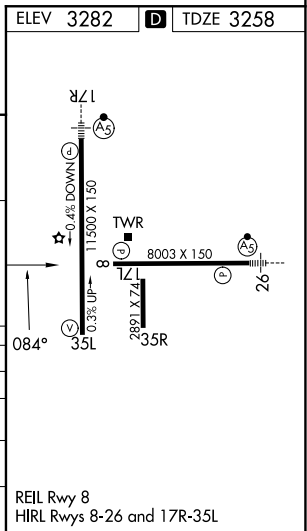


Diagram illustrating a 5000-foot RNAV (L) approach for RW08. Key features include:

- Starting point: KAPWU (5200)
- Heading: 084°
- Altitude: 4700
- Distance to CAVSI (4700): 6.2 NM
- Distance to WUMBA (1.8 NM to RW08): 2.6 NM
- Distance to *3880 (1 NM to RW08): 0.8 NM
- Distance to RW08: 1 NM
- GP 3.00° TCH 50
- *1 NAV only

CATEGORY	A	B	C	D	E
LPV DA	3458- ³ / ₄		200 (200- ³ / ₄)		
RNAV/DA	3544- ⁷ / ₈		286 (300- ⁷ / ₈)		
RNAV MDA	3640-1	382 (400-1)	3640-1 ¹ / ₈		382 (400-1 ¹ / ₈)
CIRCLING	3720-1 438 (500-1)	3740-1 458 (500-1)	3880-1 ¹ / ₂ 598 (600-1 ¹ / ₂)	3940-2 658 (700-2)	4100-3 818 (900-3)

LUBBOCK PRESTON SMITH INTL (LBB)
RNAV (GPS) RWY 8

SC-2, 01 OCT 2026 to 29 OCT 2026