


WAAS CH 90309 W19A	APP CRS 189°	Rwy Ldg TDZE Apt Elev	4500 572 588
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19

LEBANON MUNI (M54)

RNP APCH - GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using XNX altimeter setting. Rwy 19 helicopter visibility reduction below ¼ SM NA. Circling NA to Rwy's 4 and 22. When local altimeter setting not received, use XNX altimeter setting: increase LPV DA to 936 feet; increase LNAV/VNAV DA to 1033 feet and all visibilities ½ SM; increase all MDAs 40 feet, LNAV visibility Cat C and D ½ SM, and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 3000 direct JOGUB and hold.
-----------------	--	--

AWOS-3 118.325	NASHVILLE APP CON 118.4 360.7	UNICOM 122.725 (CTAF)
--------------------------	---	---------------------------------

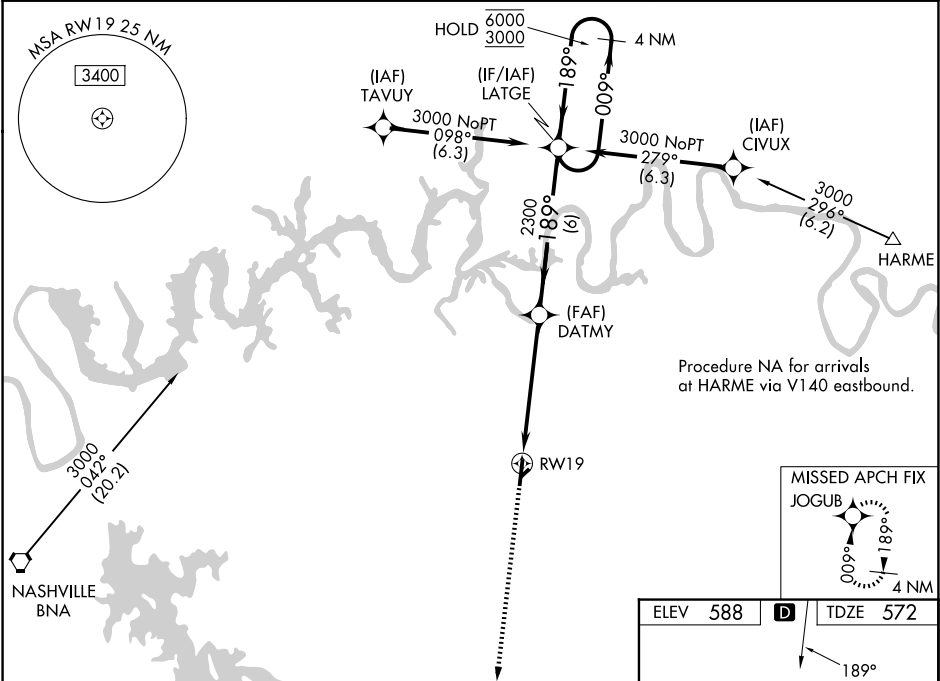

3000

↑

JOGUB

✧

1.5 NM

3.9 NM

6 NM

1.5 NM to RW19

DATMY 2300

2300

189°

189°

4 NM Holding Pattern

009° →

← 189°

6000

3000

GP 3.00°


TCH 45

LATGE

2300

2300

CATEGORY	A	B	C	D
LPV DA	822-1		250 (300-1)	
LNAV/VNAV DA	850-1		278 (300-1)	
LNAV MDA	1060-1	488 (500-1)	1060-1 ³ / ₈	488 (500-1 ³ / ₈)
CIRCLING	1100-1 512 (600-1)	1200-1 612 (700-1)	1440-2 ¹ / ₂ 852 (900-2 ¹ / ₂)	1520-3 932 (1000-3)

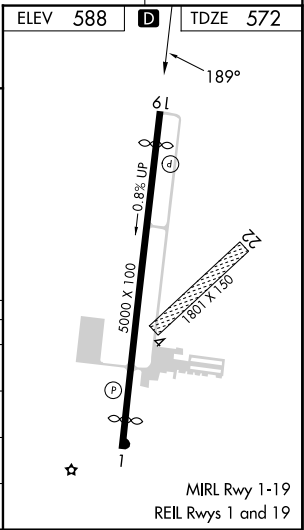

SE-1, 01 OCT 2026 to 29 OCT 2026

SE-1, 01 OCT 2026 to 29 OCT 2026