

WAAS CH 58203 W18A	APP CRS 179°	Rwy Ldg 4002 TDZE 686 Apt Elev 691
--	------------------------	---

RNAV (GPS) RWY 18
LITCHFIELD MUNI (3LF)


RNP APCH - GPS.

T Baro-VNAV and VDP NA when using Taylorville altimeter setting. Rwy 18 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C . When local altimeter setting not received, use Taylorville altimeter setting and increase LPV DA to 1025 feet and all visibilities $\frac{1}{8}$ SM, increase LNAV/VNAV DA to 1146 feet and all visibilities $\frac{1}{4}$ SM, increase all MDAs 80 feet and LNAV visibility Cat C $\frac{1}{8}$ SM.


MISSED APPROACH: Climb to 3000 direct OREPE and hold.

AWOS-3PT 118.175	ST. LOUIS APP CON 124.2 353.9	UNICOM 122.8 (CTAF) 1
----------------------------	---	--

Procedure NA for arrivals at
LITCH on V69 northeast bound.

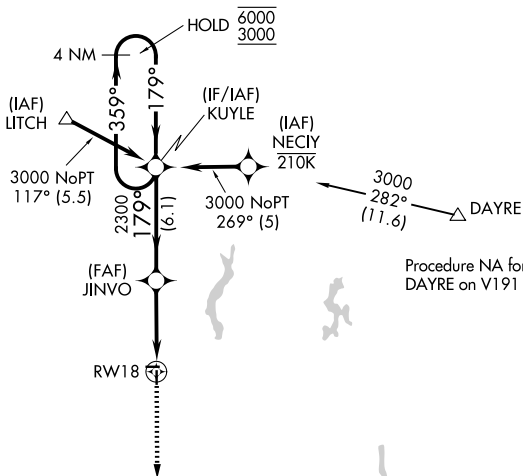

Procedure NA for arrivals at
DAYRE on V191 northeast bound.



4 NM Holding Pattern

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 23).

3000

OREPE

KUYLE

JINVO

6000

3000

359°

179°

179°

2300

2300

1.3 NM to RW18

RW18

GP 3.00°

TCH 40

6.1 NM

3.6 NM

1.3

CATEGORY	A	B	C	D
LPV DA	952-7/8 266 (300-7/8)			NA
RNAV/VNAV DA	1073-1 1/8 387 (400-1 1/8)			NA
RNAV MDA	1120-1	434 (500-1)	1120-1 1/4 434 (500-1 1/4)	NA

