

WAAS CH 90440 W13A	APP CRS 134°	Rwy Ldg TDZE Apt Elev	4148 669 674
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ANDREWS UNIVERSITY AIRPARK (C20)


⚠

NA


Rwy 13 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. Use Benton Harbor altimeter setting; when not received, use South Bend Int altimeter setting and increase all MDA 40 feet. Increase LP and LNAV Cats C/D visibility ½ SM and Circling Cats B/C ¼ SM.

MISSED APPROACH: Climb to 3000 direct AUSTJ and hold.

SOUTH BEND APP CON ★ 118.55 257.8	UNICOM 122.7 (CTAF) 0
---	---------------------------------

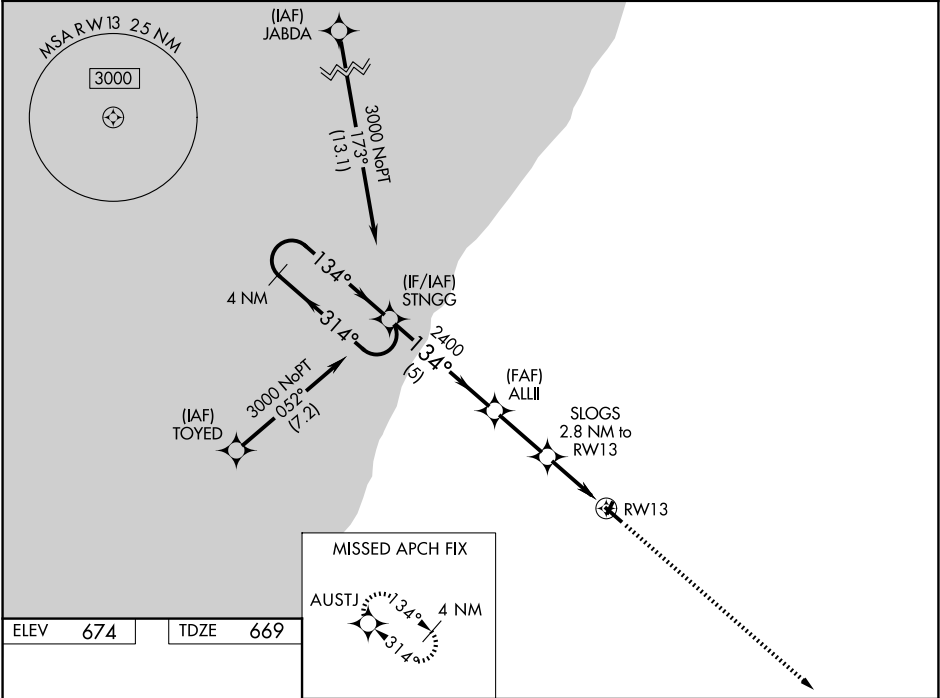

ELEV	674	TDZE	669
------	-----	------	-----

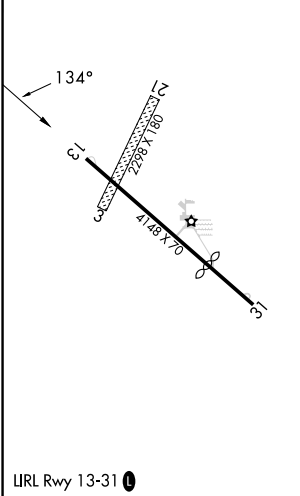

4 NM Holding Pattern

3000

314°

134°

STNGG

ALLI

3.00°

TCH 40

SLOGS

2.8 NM to RW13

RW13

5 NM

2.5 NM

2.8 NM

3000

2400

1600

3000

AUSTJ

CATEGORY	A	B	C	D
LP MDA	1100-1	431 (500-1)	1100-1¼	431 (500-1¼)
LNAV MDA	1280-1	611 (700-1)	1280-1¾	611 (700-1¾)
CIRCLING	1620-1¼	946 (1000-1¼)	1620-2¾ 946 (1000-2¾)	1620-3 946 (1000-3)