RNAV (GPS) RWY 35

CONCORD MUNI (CON)

WAAS	APP CRS	Rwy Ldg	6005
CH 90112	351°	TDZE	336
W35A		Apt Elev	342


RNP APCH - GPS.


T A Circling Rwy 12, 17, 30 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using MHT altimeter setting. When local altimeter setting not received, use MHT altimeter setting: increase LPV DA to 591 feet; increase LNAV/VNAV DA to 969 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM.


MALSR

MISSED APPROACH: Climb to 3700 direct INKOW and hold, continue climb-in-hold to 3700.

ASOS	BOSTON APP CON	UNICOM
132.325	127.35 269.075	122.7 (CTAF) L

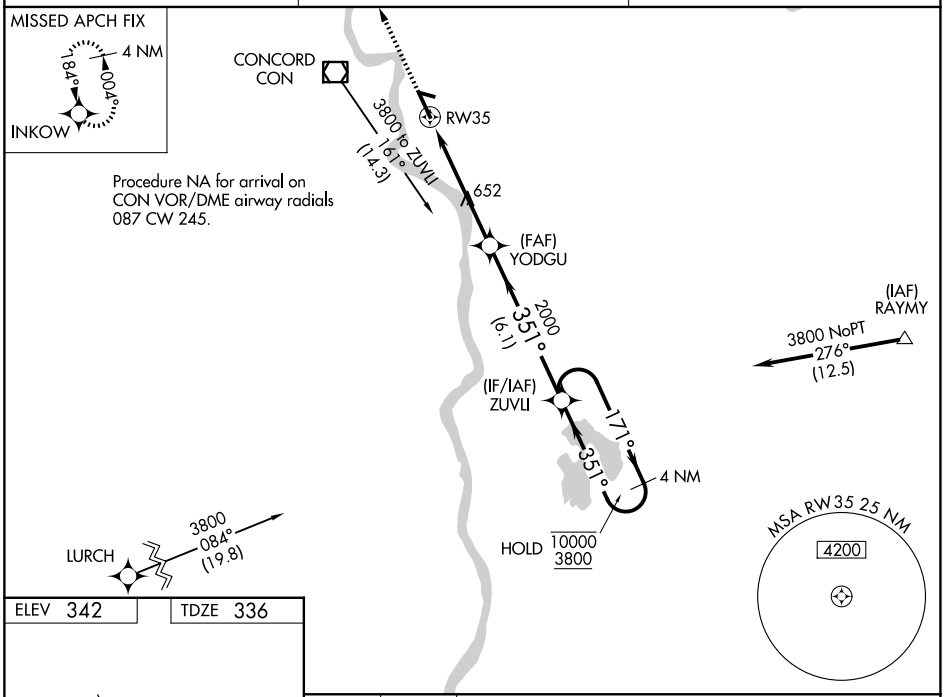

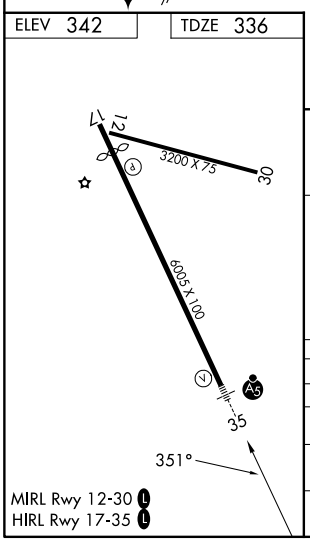

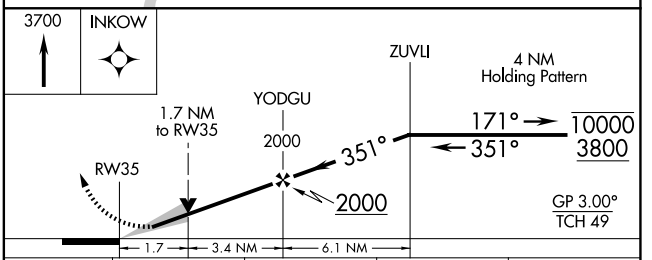

CATEGORY	A	B	C	D
LPV DA	542-½ 206 (200-½)			
LNAV/VNAV DA	920-1¼ 584 (600-1¼)			
LNAV MDA	920-½ 584 (600-½)		920-1¼ 584 (600-1¼)	
CIRCLING	1000-1 658 (700-1)	1080-1 738 (800-1)	1500-3 1158 (1200-3)	

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026