RNAV (RNP) Z RWY 1L

TAMPA INTL (TPA)

APP CRS	Rwy Ldg	TDZE	Apt Elev
007°	10800	11	26


RNP AR APCH - GPS.

ALSF-2

MISSED APPROACH: Climb to 2000 direct MERRA and hold.


For uncompensated Baro-VNAV systems, procedure NA below 4°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.13 all Cats visibility to 4500 RVR.

D-ATIS	TAMPA APP CON	TAMPA TOWER	GND CON
126.45	118.5 307.175	119.5 269.4	121.7 269.4

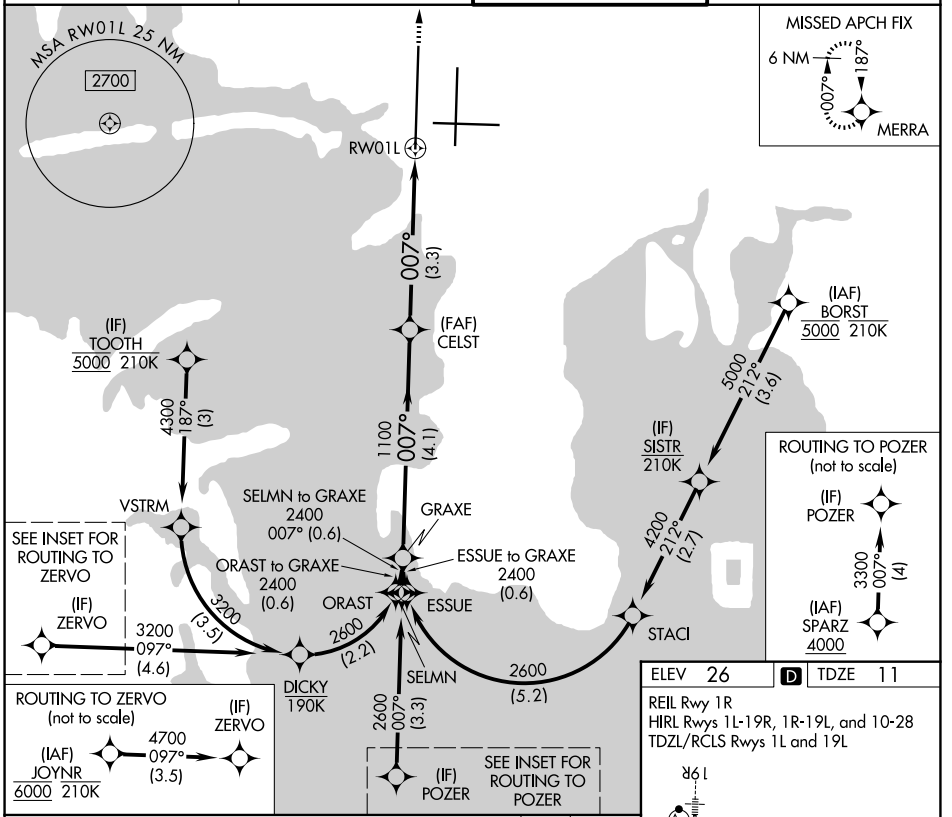


ELEV 26 D TDZE 11

REIL Rwy 1R
HIRL Rwys 1L-19R, 1R-19L, and 10-28
TDZL/RCLS Rwys 1L and 19L

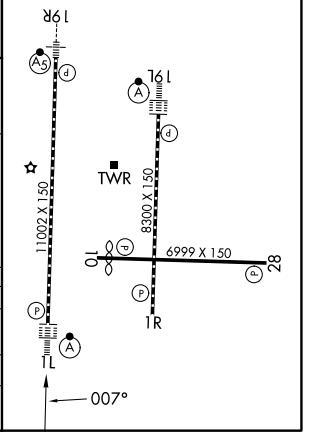

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

2000 MERRA

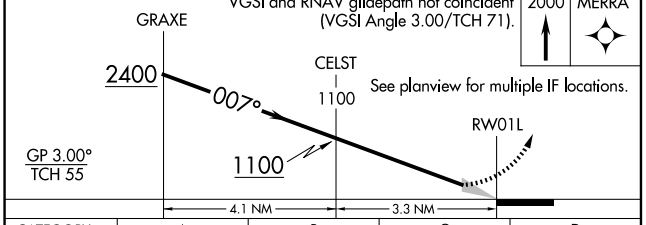

CATEGORY	A	B	C	D
RNP 0.13 DA	299/24	288 (300-½)	305/24 294 (300-½)	324/24 313 (300-½)
RNP 0.30 DA	405/35	394 (400-⅝)		

AUTHORIZATION REQUIRED

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026