RNAV (GPS) RWY 5

AKRON-CANTON RGNL (CAK)

WAAS	APP CRS	Rwy Ldg	8204
CH 77620	054°	TDZE	1199
W05A		Apt Elev	1226


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 3000 direct EGGII and on track 048° to ACO VOR/DME and hold.

ATIS	CLEVELAND APP CON★	AKRON-CANTON TOWER	GND CON
121.05	125.5 269.25	134.75 279.575	121.7 348.6

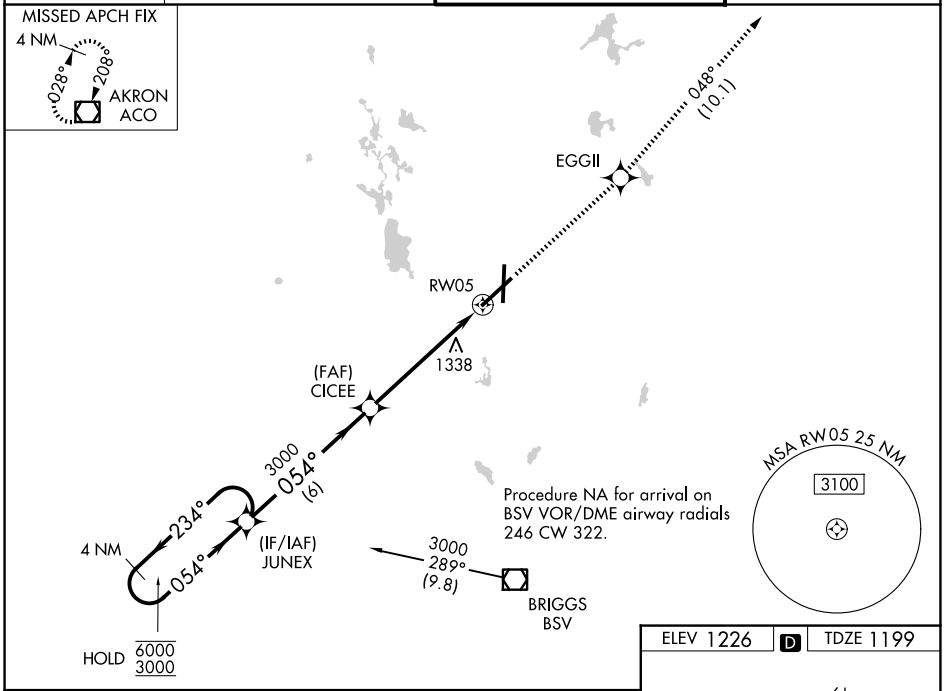

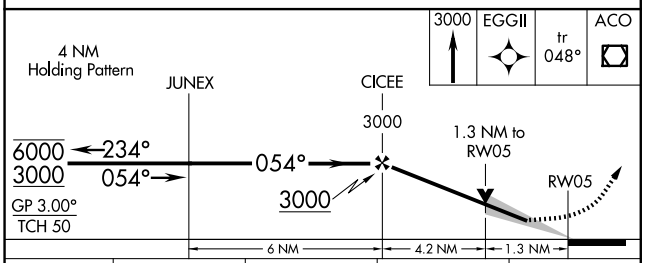

CATEGORY	A	B	C	D
LPV DA*	1399/24	200 (200-½)		
LNAV/VNAV DA	1577/35	378 (400-⅝)		
LNAV MDA	1640/24	441 (500-½)	1640/45	441 (500-⅞)
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)

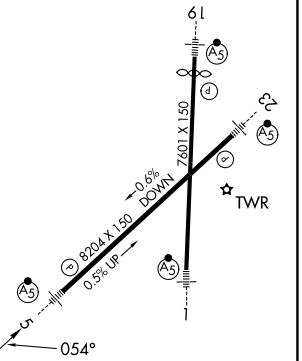

HIRL Rwys 1-19 and 5-23

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026