# RNAV (GPS) RWY 36

TUPELO RGNL (TUP)

| WAAS | APP CRS | Rwy Ldg | 7150 |
|---|---|---|---|
| CH 93712 | 002° | TDZE | 346 |
| W36A | | Apt Elev | 346 |


RNP APCH.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ⅜ mile and Circling Cats C and D ½ mile. For inop ALS when using Columbus AFB altimeter setting, increase LPV all Cats visibility ½ SM. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MALSR


MISSED APPROACH: Climb to 3000 direct ZUMHA and hold.

| ASOS | MEMPHIS CENTER | TUPELO TOWER ★ | GND CON |
|---|---|---|---|
| 133.525 | 128.5 279.55 | 118.775 (CTAF) L 254.275 | 121.825 254.275 |

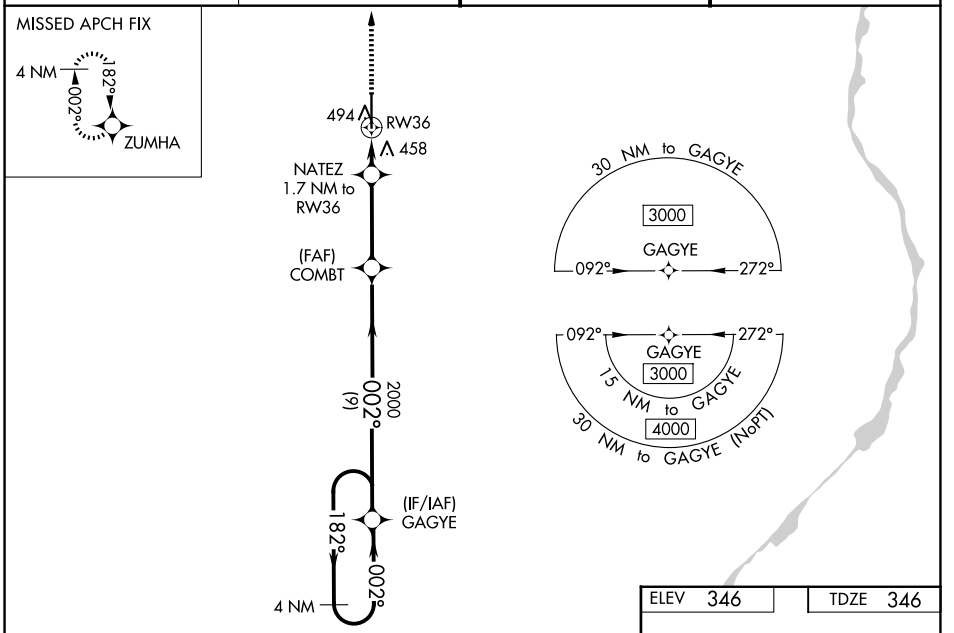

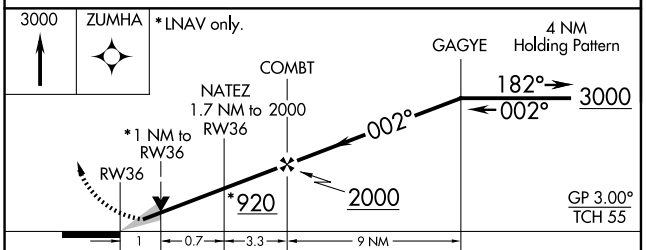
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 546-½ 200 (200-½) | | | |
| LNAV/VNAV DA | 730-¾ 384 (400-¾) | | | |
| LNAV MDA | 720-½ 374 (400-½) | | 720-⅝ 374 (400-⅝) | |
| CIRCLING | 820-1 474 (500-1) | | 900-1½ 554 (600-1½) | 1140-2½ 794 (800-2½) |



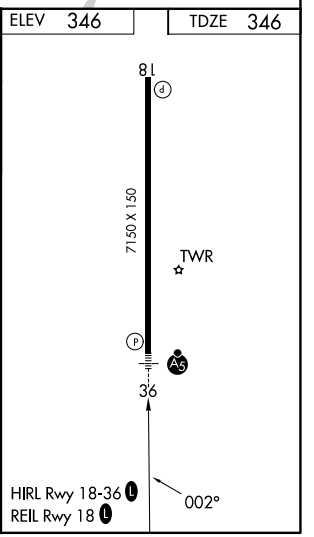


SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026