LOC/DME I-SBO	APP CRS	Rwy Ldg 6021
109.35	136°	TDZE 327
Chan 30 (Y)		Apt Elev 327

ILS or LOC RWY 14


EAST GEORGIA RGNL (SBO)

DME required. RADAR required for procedure entry.

Rwy 14 helicopter visibility reduction below ¾ SM NA. VDP NA when using VDI altimeter setting. When local altimeter setting not received, use VDI altimeter setting: increase S-ILS 14 DA to 705 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and visibility S-LOC 14 Cats C and D ⅜ SM, and Circling Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct DBN VORTAC and hold.

AWOS-3	ATLANTA CENTER	UNICOM
133.375	127.95 343.75	122.975 (CTAF) L

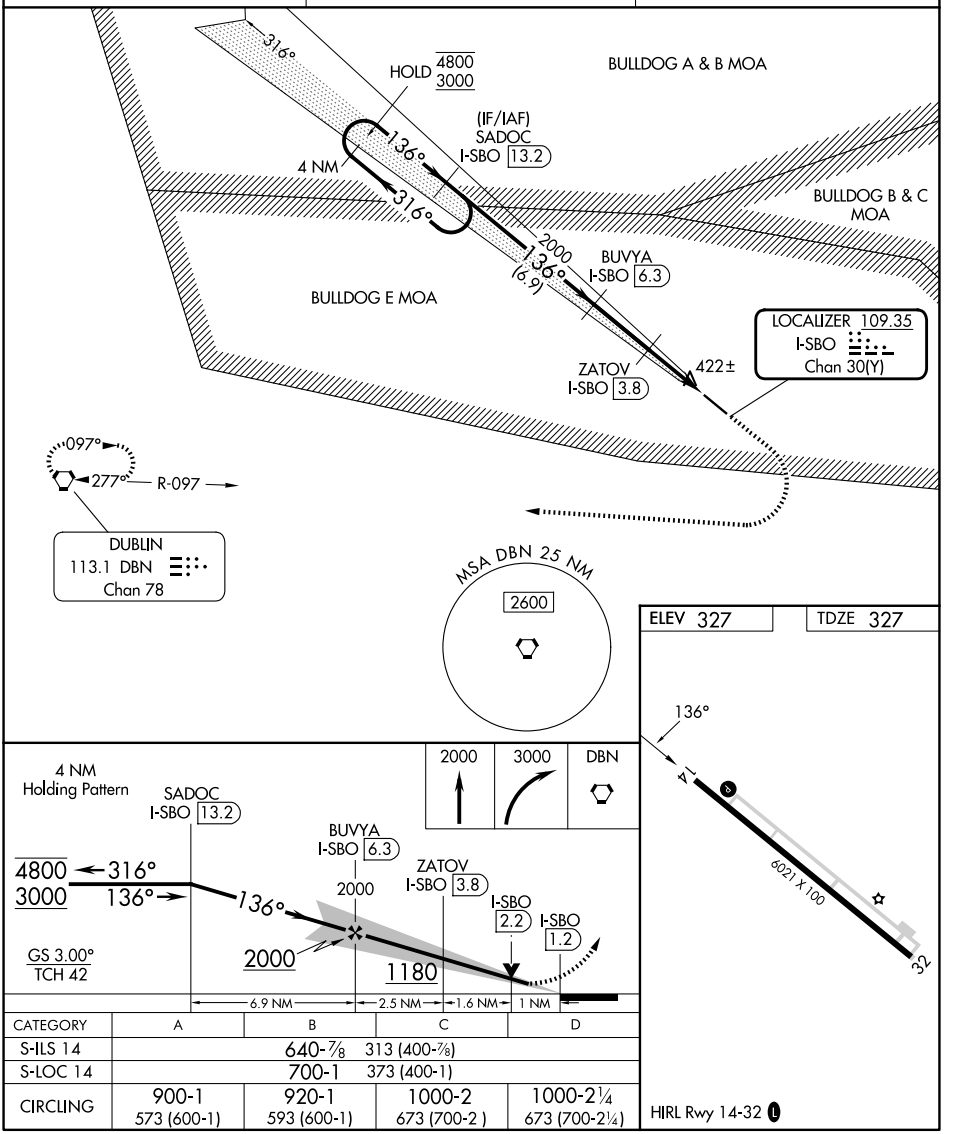

CATEGORY	A	B	C	D
S-ILS 14	640-⅞		313 (400-⅞)	
S-LOC 14	700-1		373 (400-1)	
CIRCLING	900-1 573 (600-1)	920-1 593 (600-1)	1000-2 673 (700-2)	1000-2¼ 673 (700-2¼)

HIRL Rwy 14-32 L

SE-4, 29 OCT 2026 to 26 NOV 2026