RNAV (GPS) RWY 36L

DENTON ENTERPRISE (DTO)


WAAS	APP CRS		36L	36R
CH **56543**	**357°**	Rwy Ldg	**5003**	**6502**
W36B		TDZE	**641**	**639**
		Apt Elev	**643**	**643**

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. Rwy 36L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 direct CRAFF and hold, continue climb-in-hold to 4000.

ATIS	LONE STAR APP CON	DENTON TOWER ★	GND CON
119.325	**118.1 306.95**	**119.95** (CTAF) L	**123.95**

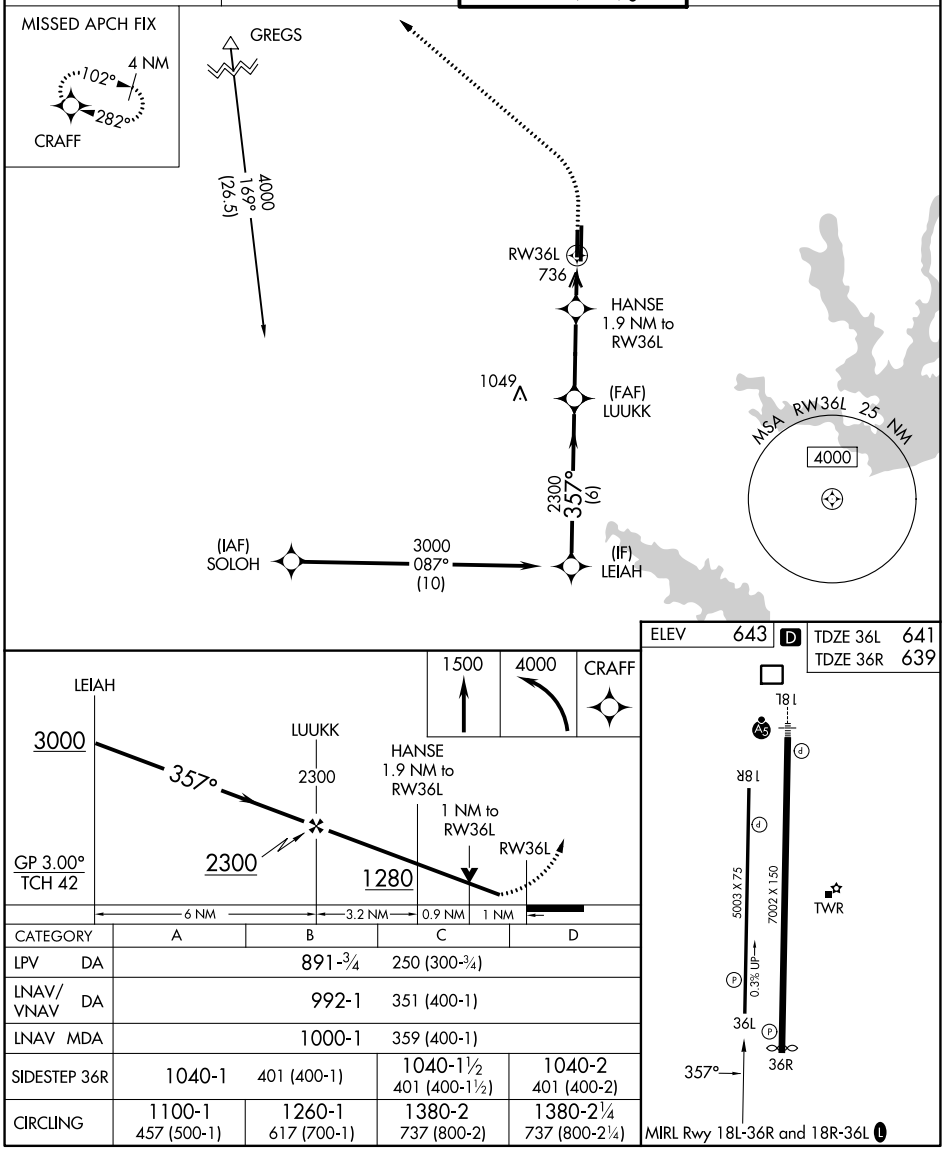

CATEGORY	A	B	C	D
LPV DA		891-¾	250 (300-¾)	
LNAV/VNAV DA		992-1	351 (400-1)	
LNAV MDA		1000-1	359 (400-1)	
SIDESTEP 36R	1040-1 401 (400-1)		1040-1½ 401 (400-1½)	1040-2 401 (400-2)
CIRCLING	1100-1 457 (500-1)	1260-1 617 (700-1)	1380-2 737 (800-2)	1380-2¼ 737 (800-2¼)

ELEV 643 D

TDZE 36L 641
TDZE 36R 639

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026