WAAS	APP CRS	Rwy Idg	5003
CH 82124	013°	TDZE	817
W01A		Apt Elev	817


RNAV (GPS) RWY 1
DOUGLAS HUNTER FLD (1M5)

RNP APCH.

Baro-VNAV NA when using Bowling Green altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Bowling Green altimeter setting and increase LPV DA to 1180 and all visibilities ⅛ mile; increase all LNAV/VNAV DA to 1210 and all visibilities ¼ mile; increase all MDA 100 feet and increase LNAV Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct EDROY and hold.

AWOS-3PT	NASHVILLE APP CON	UNICOM
118.175	119.35 372.0	122.975 (CTAF) L

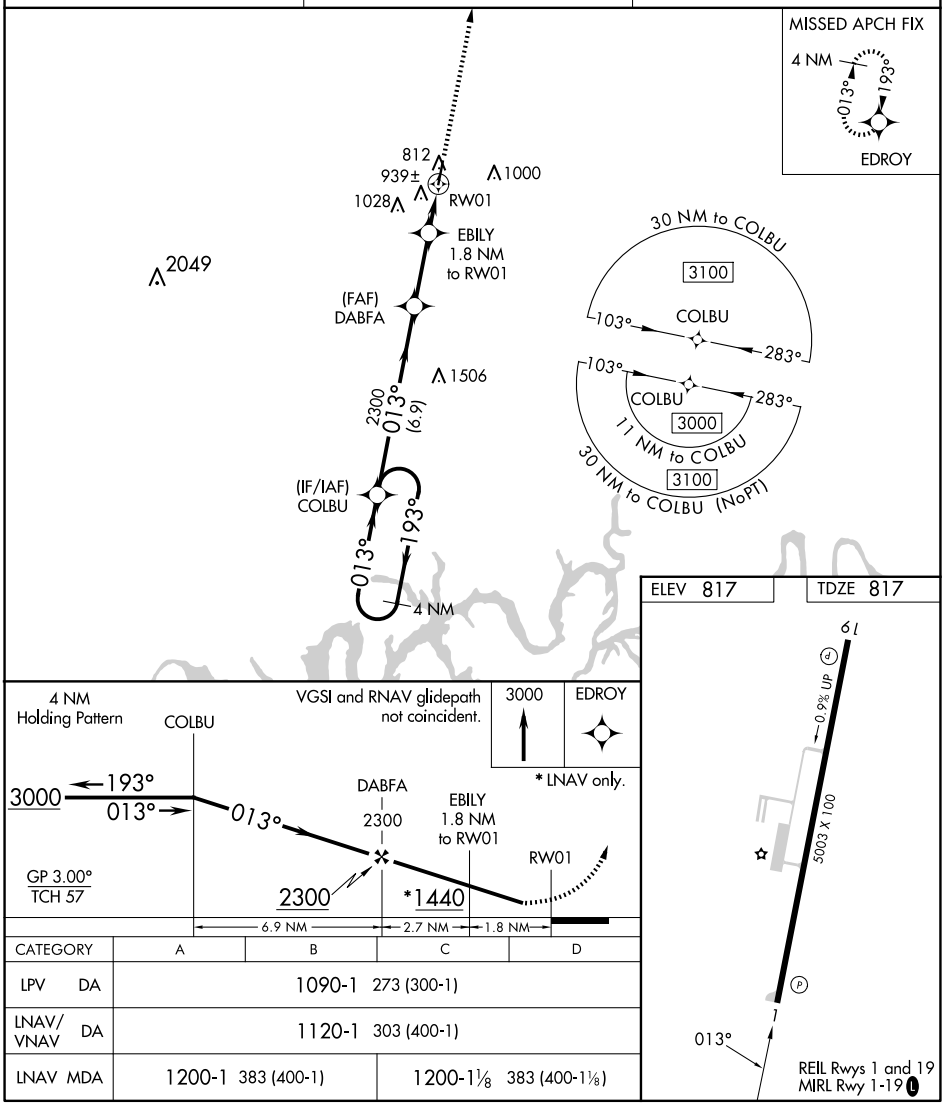

CATEGORY	A	B	C	D
LPV DA	1090-1 273 (300-1)			
LNAV/VNAV DA	1120-1 303 (400-1)			
LNAV MDA	1200-1 383 (400-1)		1200-1⅛ 383 (400-1⅛)	

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026