WAAS CH **99644** **W18A**	APP CRS **180°**	Rwy Ldg **6001** TDZE **1316** Apt Elev **1316**

RNAV (GPS) RWY 18


MONETT RGNL (HFJ)


RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using Joplin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Joplin altimeter setting; increase LPV DA to 1678 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1742 feet and all visibilities ⅜ SM; increase all MDAs 120 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 3100 direct STERL and hold.

AWOS-3PT	SPRINGFIELD APP CON	CLNC DEL	UNICOM
118.275	**124.95 318.2**	**121.85**	**123.075** (CTAF) L

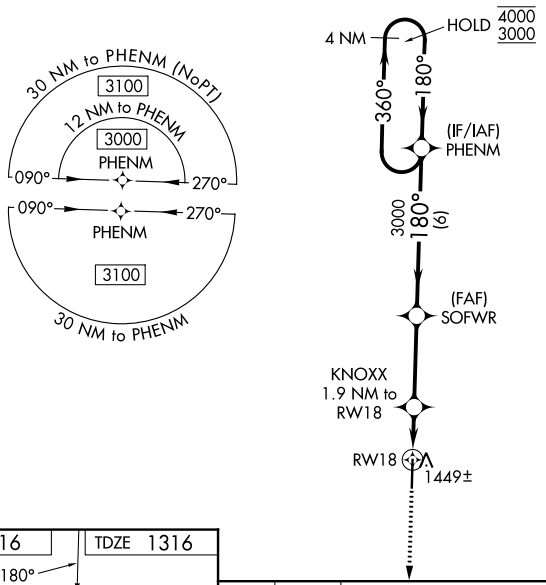

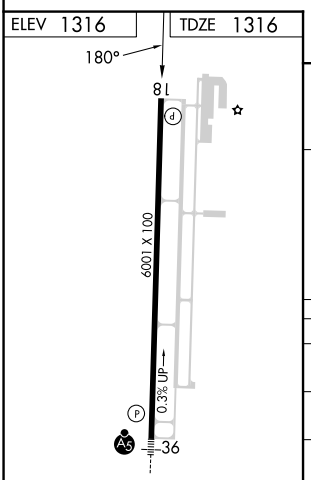

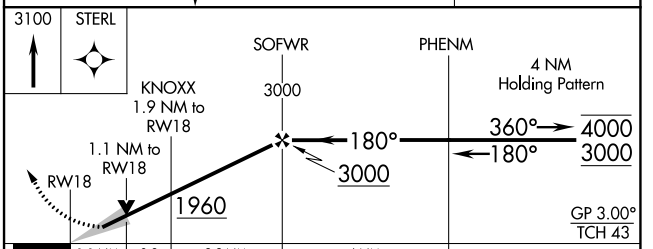

CATEGORY	A	B	C	D
LPV DA	1566-¾ 250 (300-¾)			
LNAV/VNAV DA	1630-⅞ 314 (400-⅞)			
LNAV MDA	1700-1 384 (400-1)		1700-1⅛ 384 (400-1⅛)	
CIRCLING	1760-1 444 (500-1)	1900-1 584 (600-1)	1900-1½ 584 (600-1½)	2060-2½ 744 (800-2½)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026