


APP CRS	Rwy Idg	7001
224°	TDZE	12
	Apt Elev	21


RNAV (RNP) Z RWY 22


LAGUARDIA (LGA)

RNP AR APCH - GPS. RF required.		ALSF-1	MISSED APPROACH: Climb to 3000 direct PROUD and hold, continue climb-in-hold to 3000. *Missed approach requires minimum climb of 397 feet per NM to 560.
NA For uncompensated Baro-VNAV systems, procedure NA below -11°C or above 54°C. For inop ALS, increase RNP 0.30 DA* visibility to RVR 5500.			

D-ATIS ARR	125.95	NEW YORK APP CON	120.8 263.0	LAGUARDIA TOWER	118.7 263.0	GND CON	121.7 263.0	CLNC DEL	135.2	CPDLC	
D-ATIS DEP	127.05										

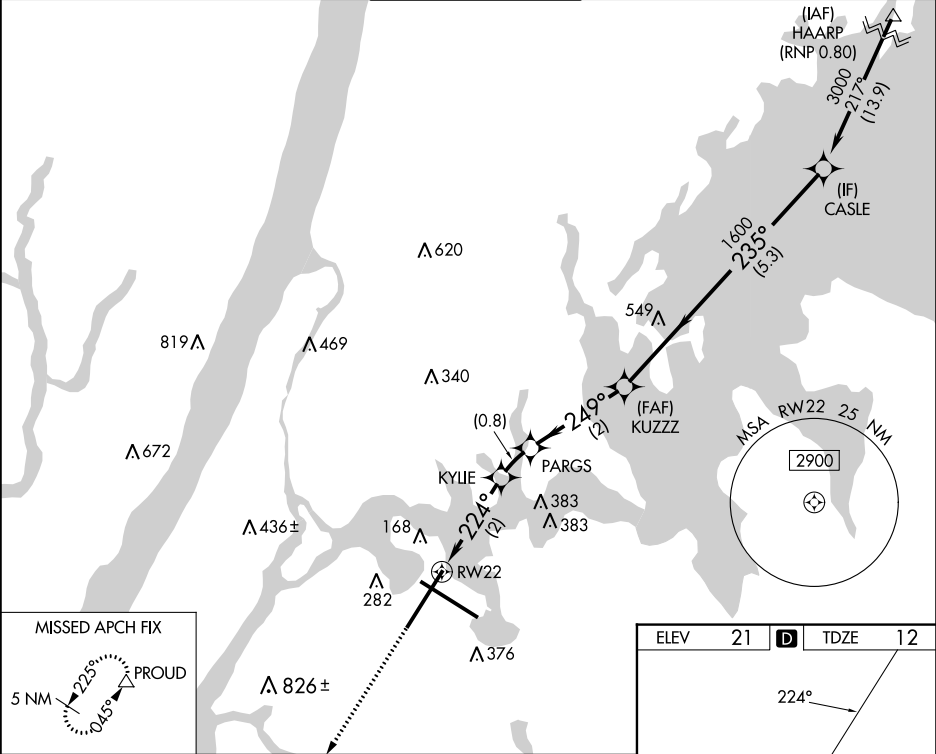

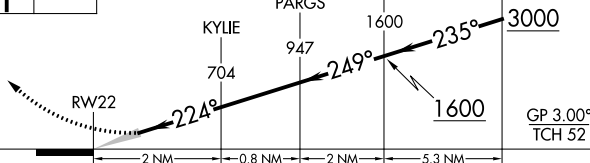3000	PROUD	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).			
					
CATEGORY	A	B	C	D	
RNP 0.30 DA*	384/35		372 (400-¾%)		
RNP 0.30 DA	445/40		433 (500-¾%)		

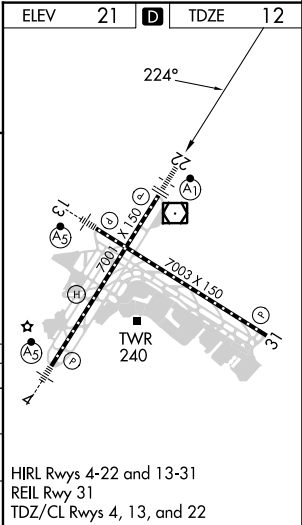

AUTHORIZATION REQUIRED		HIRL Rwy 4-22 and 13-31
		REIL Rwy 31
		TDZ/CL Rwy 4, 13, and 22