


WAAS CH 93823 W23A	APP CRS 227°	Rwy Idg 8700 TDZE 50 Apt Elev 54
--	------------------------	---

RNAV (GPS) Y RWY 23
RHODE ISLAND TF GREEN INTL (PVD)

RNP APCH.  For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase NNAV Cats C/D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR 		MISSED APPROACH: Climb to 1700 then climbing right turn to 2500 direct FOSTY and hold.	
D-ATIS 124.2	PROVIDENCE APP CON ★ 123.675 244.875		PROVIDENCE TOWER ★ 120.7 (CTAF) 0 257.8		GND CON 121.9 348.6	CLNC DEL 126.65 348.6

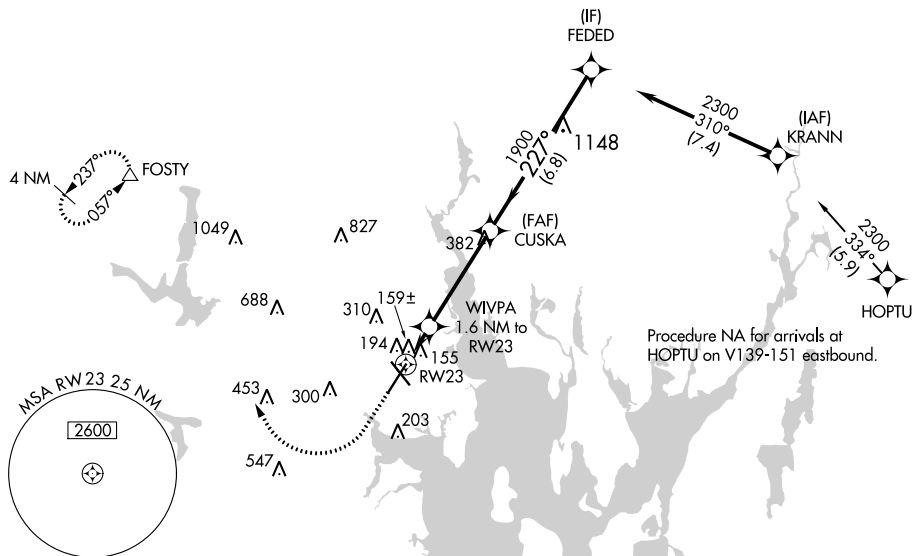

1700 ↑	2500 ↗	FOSTY △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 41).			
*LNAV only		WVPA 1.6 NM to RW23	CUSKA 1900	FEDED 2300		
RW23		*1 NM to RW23	227°		GP 3.00° TCH 51	
1 NM		0.6 NM	4.1 NM	6.8 NM		
CATEGORY	A	B	C	D		
LPV DA **	250/24		200 (200-½)			
LNAV/ VNAV DA	346/24		296 (300-½)			
LNAV MDA	460/24	410 (500-½)	460/40	410 (500-¾)		
C CIRCLING	560-1 506 (600-1)	640-1 586 (600-1)	640-1½ 586 (600-1½)	860-2½ 806 (900-2½)		