

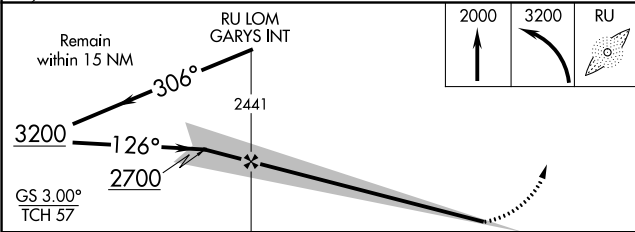


LOC I-RUM	APP CRS	Rwy Idg	5601
108.7	126°	TDZE	593
		Apt Elev	595

ILS or LOC RWY 13
SAN MARCOS RGNL (HYI)

ADF required.	MALS	MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM/INT and hold.
NA Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to S-ILS 13 all Cats. For inop ALS, increase S-LOC 13 Cat C/D/E visibility to 1 1/8 SM.	A	

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER ★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
-------------------	--------------------------------	--	--------------------	---------------------	---

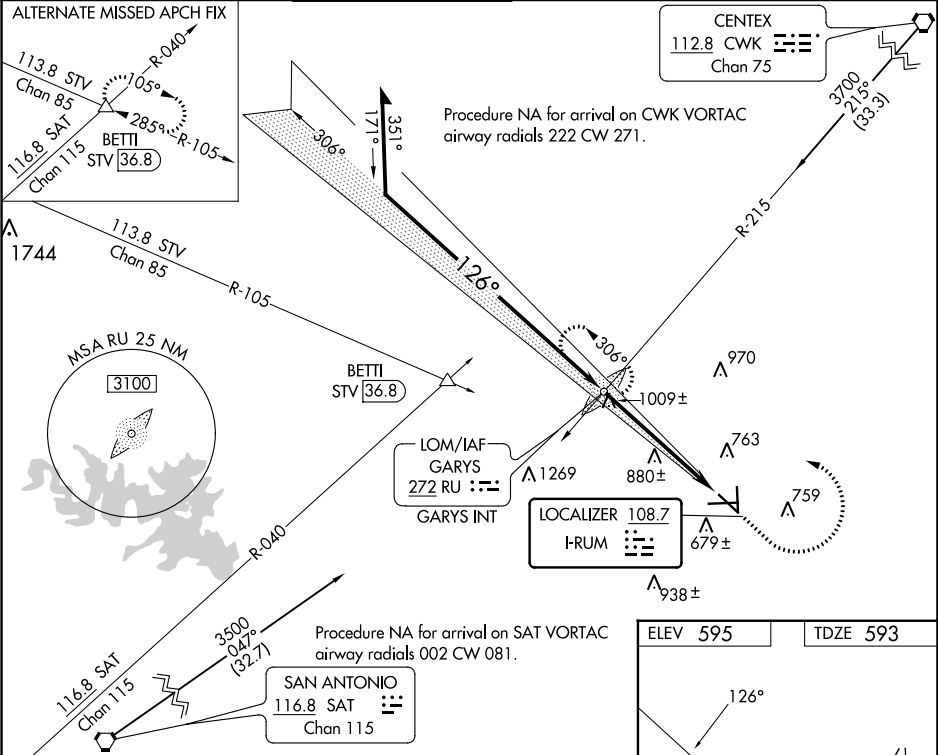

		5.5 NM					
CATEGORY	A	B	C	D	E		
S-ILS-13	793-3/4 200 (200-3/4)						
S-LOC-13	1260-3/4 667 (700-3/4)		1260-13/4 667 (700-13/4)			MIRL Rwy 8-26, 13-31, and 17-35 0	
			FAF to MAP 5.5 NM				
CIRCLING	1260-1 665 (700-1)		1260-17/8 665 (700-17/8)	1320-21/4 725 (800-21/4)	1340-23/4 745 (800-23/4)	Knots	60 90 120 150 180
						Min:Sec	5:30 3:40 2:45 2:12 1:50

SC-3, 18 APR 2024 to 16 MAY 2024

SC-3, 18 APR 2024 to 16 MAY 2024