

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>50109</b><br><b>W17A</b> | APP CRS<br><b>174°</b> | Rwy Idg <b>6705</b><br>TDZE <b>1530</b><br>Apt Elev <b>1533</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 17

NEWTON-CITY-COUNTY (E WK)

RNP APCH.

▼


⚠

When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1891 feet and visibility ½ SM; increase all MDAs 100 feet and visibility Cat C and LNAV Cat D ¼ SM. VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For inop ALS, increase LPV visibility to ¾ SM and LNAV Cat C/D to 1 ¾ SM. For inop ALS when using Wichita Dwight D Eisenhower Ntl altimeter setting, increase LPV visibility to 1 SM. Circling Rwy 8, 26 NA at night.

MALSR

MISSED APPROACH:  
Climb to 3600 direct SPINA and hold.

|                            |                                       |                           |                                        |
|----------------------------|---------------------------------------|---------------------------|----------------------------------------|
| AWOS-3PT<br><b>123.875</b> | WICHITA APP CON<br><b>125.5 306.2</b> | CLNC DEL<br><b>126.55</b> | UNICOM<br><b>123.0</b> (CTAF) <b>0</b> |
|----------------------------|---------------------------------------|---------------------------|----------------------------------------|

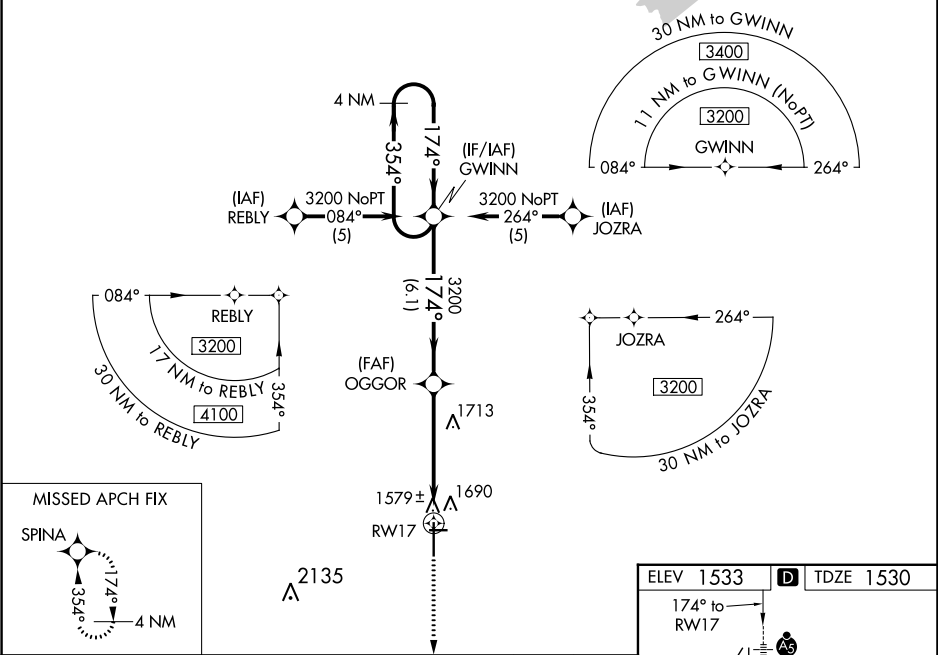

|                      |                    |             |         |             |              |                  |              |
|----------------------|--------------------|-------------|---------|-------------|--------------|------------------|--------------|
| 4 NM Holding Pattern |                    | GWINN       |         | OGGOR       |              | 3600             | SPINA        |
| 3200 ← 354°          |                    | 174° →      |         | 3200        |              | * 1.4 NM to RW17 | * LNAV only. |
| GP 3.00°             |                    | TCH 55      |         | 6.1 NM      |              | 3.6 NM           | 1.4 NM       |
| CATEGORY             | A                  | B           | C       | D           |              |                  |              |
| LPV DA               | 1791-½ 261 (300-½) |             |         |             |              |                  |              |
| LNAV/ VNAV DA        | NA                 |             |         |             |              |                  |              |
| LNAV MDA             | 2020-½             | 490 (500-½) | 2020-1  | 490 (500-1) |              |                  |              |
| CIRCLING             | 2020-1             | 487 (500-1) | 2020-1½ | 2100-2      | 487 (500-1½) | 567 (600-2)      |              |

