

WAAS CH 45915 W09A	APP CRS 094°	Rwy Idg TDZE 141 Apt Elev 141
--	------------------------	---

RNAV (GPS) RWY 9

DECATUR COUNTY INDUSTRIAL AIR PARK (BGE)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP and Baro-VNAV NA when using Tallahassee Intl altimeter setting. When local altimeter setting not received, use Tallahassee Intl altimeter setting and increase LPV DA to 522 feet and LNAV/VNAV DA to 562 feet; increase all MDAs 100 feet and increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C, D visibility ¼ SM and Circling Cat C, D visibility ½ SM.

⚠

MISSED APPROACH:
Climb to 2600 direct HASUR and hold.

AWOS-3PT 121.125	TALLAHASSEE APP CON★ 128.7 254.3	CLNC DEL 124.775 335.65	UNICOM 122.975 0 (CTAF)
----------------------------	--	-----------------------------------	-----------------------------------

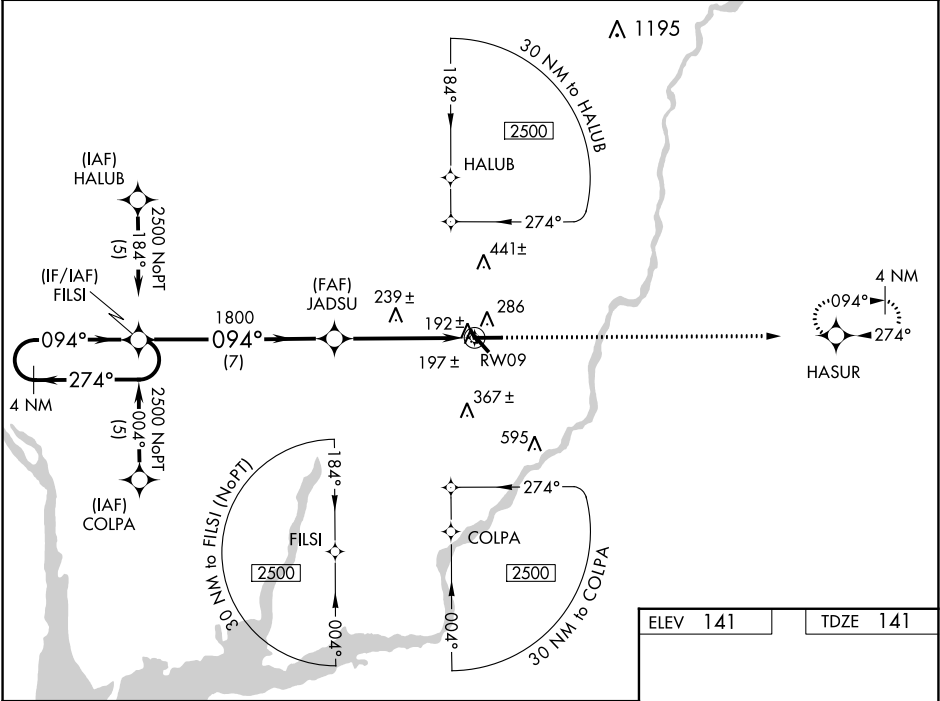

4 NM Holding Pattern				2600 HASUR	
GP 3.00° TCH 40				*1.1 NM to RW09	
7 NM				*LNAV only	
3.9 NM				RW09	
1.1 NM					
CATEGORY	A	B	C	D	
LPV DA	427-1				286 (300-1)
LNAV/VNAV DA	467-1¼				326 (400-1¼)
LNAV MDA	540-1				540-1¼
	399 (400-1)				399 (400-1¼)
CIRCLING	600-1	459 (500-1)	800-1¾	860-2¼	
					719 (800-2¼)

