

WAAS CH 97700 W29A	APP CRS 291°	Rwy Idg TDZE 11 Apt Elev 11	4319
--	------------------------	---	-------------

RNAV (GPS) RWY 29


NEW SMYRNA BEACH MUNI (EVB)

RNP APCH-GPS.

▼ Rwy 29 helicopter visibility reduction below ¾ SM NA. VDP NA when using Daytona Beach altimeter setting. Circling Rwy 7, 11, 25 NA at night. When local altimeter setting not received, use Daytona Beach altimeter setting increase LPV DA to 333 feet and all visibilities ¼ SM. Increase all MDAs 40 feet, LNAV Cat C/D visibility ½ SM, and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct ZALGO and hold.

ATIS 124.625	DAYTONA APP CON 125.35 322.3	NEW SMYRNA TOWER BEACH★ 119.675 (CTAF) 0	GND CON 121.325	UNICOM 122.95
------------------------	--	--	---------------------------	-------------------------

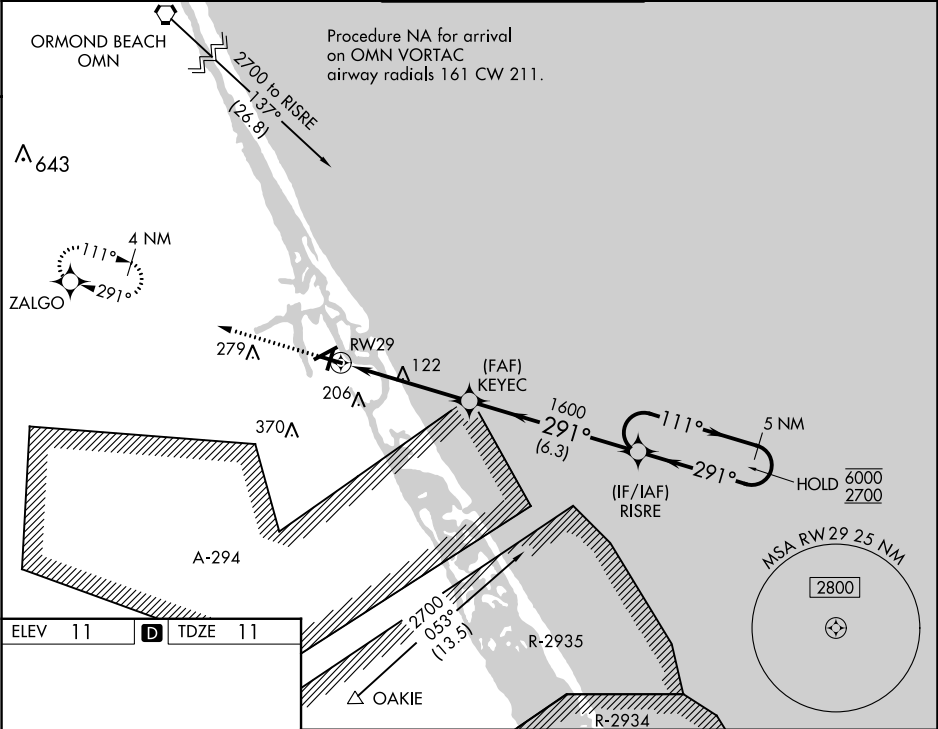

ELEV 11 TDZE 11

REIL Rwy 7 and 25
MIRL Rwy 7-25 and 11-29 0

2000 ↑	ZALGO 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).			5 NM Holding Pattern
*LNAV only.		KEYEC 1600	RISRE		
*1.1 NM to RW29		1600	291°	111° → 6000	← 291° 2700
RW29		1600	GP 3.00° TCH 40		
1.1 NM		3.7 NM	6.3 NM		
CATEGORY	A	B	C	D	
LPV DA	308-7/8		297 (300-7/8)		
LNAV MDA	380-1		369 (400-1)		
CIRCLING	440-1 429 (500-1)	520-1 509 (600-1)	680-1 3/4 669 (700-1 3/4)	680-2 669 (700-2)	