


WAAS CH 87137 W31B	APP CRS 306°	Rwy ldg 2755 TDZE 160 Apt Elev 162
--	------------------------	---

RNAV (GPS) RWY 31


SOUTH NAKNEK NR 2 (WSN)(PFWS)

RNP APCH.	MISSED APPROACH:
▼ Baro-VNAV and VDP NA when using King Salmon altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use King Salmon altimeter setting and increase all DA/MDA 40 feet. Circling Rwy 5 NA at night.	Climb to 700 then climbing left turn to 3200 direct TIKGU and hold.

AWOS-3P 121.575	ANCHORAGE CENTER 124.8 354.0	CTAF 122.9 0
---------------------------	--	------------------------

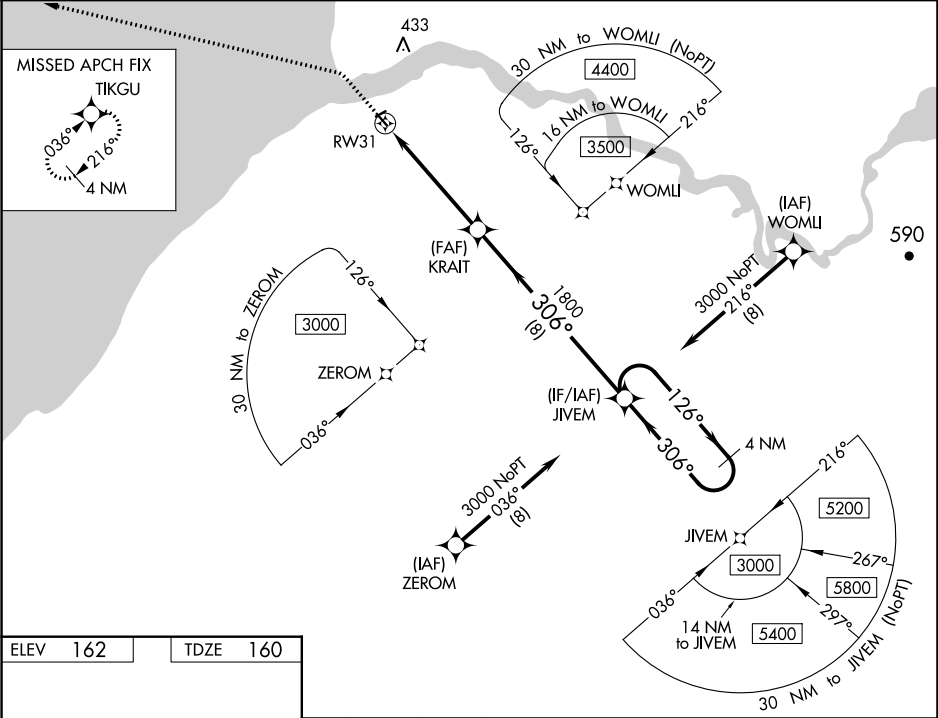

ELEV 162	TDZE 160
----------	----------

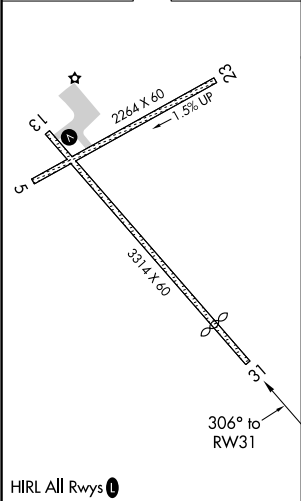

700

↑

3200

↙

TIKGU

✦

4 NM Holding Pattern

JIVEM

126° →

← 306°

3000

KRAIT

1800

306°

1800

RW31

↙

1.6 NM

3.4 NM

8 NM

GP 3.00°

TCH 35

*LNAV only.

*1.6 NM to RW31

CATEGORY	A	B	C	D
LPV DA	410-1	250 (300-1)	NA	
LNAV/VNAV DA	410-1	250 (300-1)	NA	
LNAV MDA	700-1	540 (600-1)	NA	
 CIRCLING	700-1	538 (600-1)	NA	