VORTAC TWF	APP CRS	Rwy Idg	8703
115.8	077°	TDZE	4149
Chan 105		Apt Elev	4154

VOR RWY 8

JOSLIN FIELD-MAGIC VALLEY RGNL (TWF)

T A Night landing: Rwy 30 NA. When local altimeter setting not received, use Jerome altimeter setting and increase all MDA 60 feet and S-8 Cats C and D visibility ½ mile, S-8 Cat B and Circling Cat B and C visibility ¼ mile. Increase AZAJI FIX minimums S-8 Cat C and D and Circling Cat C visibility ¼ mile. VDP NA when using Jerome altimeter setting.

MISSED APPROACH: Climb to 6000 then left turn direct TWF VORTAC and hold.

ASOS	TWIN FALLS APP CON*	TWIN FALLS TOWER*	GND CON	CLNC DEL	UNICOM
135.025	126.7 353.75	118.2 (CTAF) L 317.5	121.7	123.65	122.95

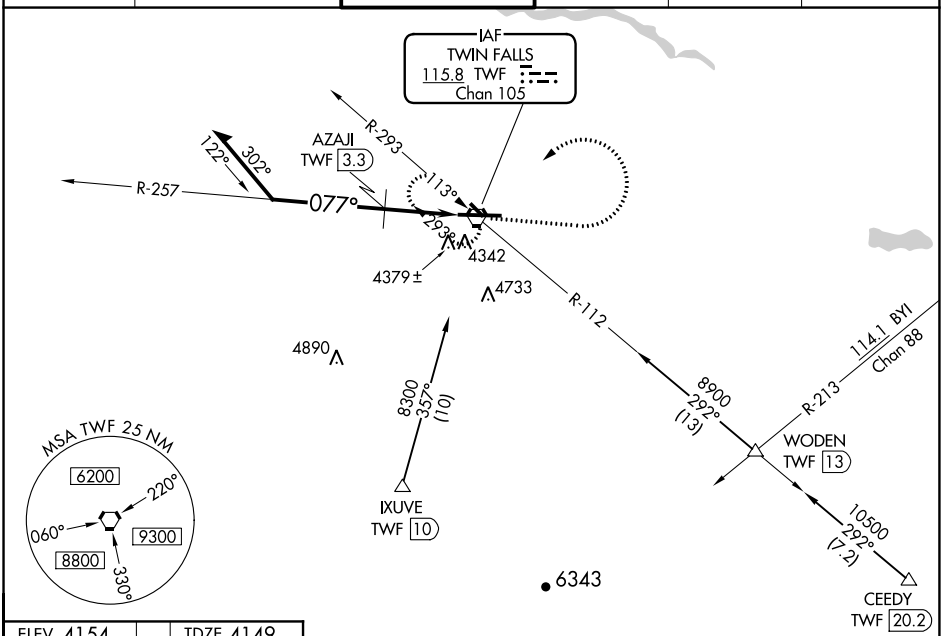

NW-1, 03 DEC 2020 to 31 DEC 2020

NW-1, 03 DEC 2020 to 31 DEC 2020

ELEV 4154 TDZE 4149



REIL Rwy 8 L
HIRL Rwy 8-26 L

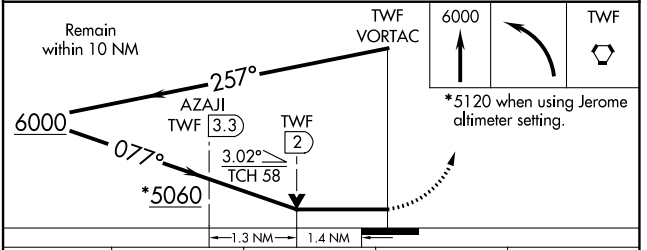

CATEGORY	A	B	C	D
S-8	5060-1¼	911 (1000-1¼)	5060-2½	911 (1000-2½)
C CIRCLING	5060-1¼	906 (1000-1¼)	5100-2¾	5100-3
			946 (1000-2¾)	946 (1000-3)
AZAJI FIX MINIMUMS				
S-8	4640-1	491 (500-1)	4640-1⅜	491 (500-1⅜)
C CIRCLING	4700-1	4780-1	5100-2¾	5100-3
	546 (600-1)	626 (700-1)	946 (1000-2¾)	946 (1000-3)