# RNAV (RNP) Y RWY 27L

CHICAGO O'HARE INTL (ORD)

| APP CRS | Rwy Idg | 7782 |
|---|---|---|
| 273° | TDZE | 654 |
| | Apt Elev | 680 |

For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 on track 273° to WASCO and hold.

| D-ATIS | CHICAGO APP CON | O'HARE TOWERS | GND CON | (TWR CENTER) |
|---|---|---|---|---|
| 135.4 | 119.0 292.125 | 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) | 124.125 (TWR NORTH) | 121.75 (OBND) |
| 282.225 | | 120.75 121.15 126.9 132.7 348.0 (CENTER) | 118.05 (TWR SOUTH) 226.675 (ALL TWRS) | 121.9 (IBND) |

CLNC DEL 121.6 | CPDLC

RADAR REQUIRED

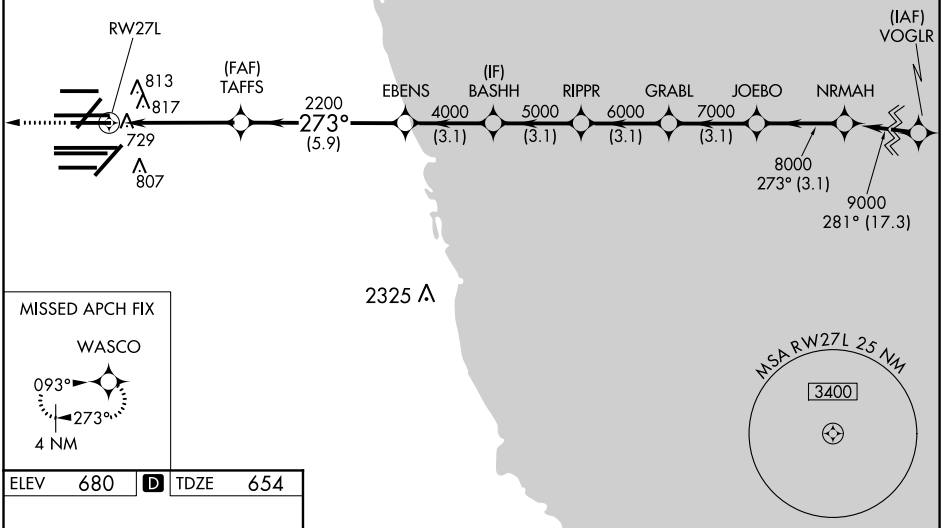


MISSED APCH FIX

WASCO

093°

273°

4 NM

MSA RW27L 25 NM

3400

ELEV 680 | D | TDZE 654

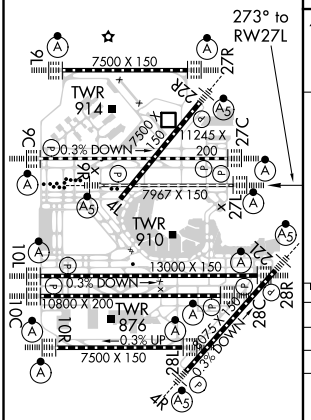


4000 | tr 273° | WASCO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).

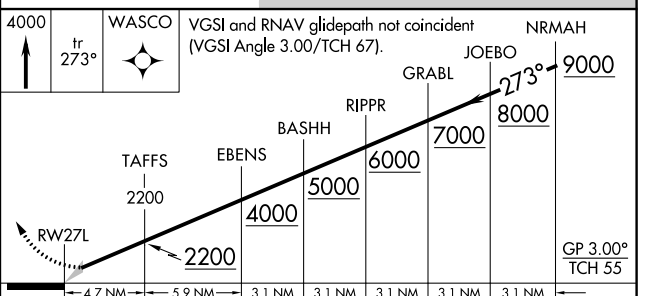


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.15 DA | 992/30 338 (400-⅝) | | | |
| RNP 0.30 DA | 1162-1¼ 508 (500-1¼) | | | |

AUTHORIZATION REQUIRED



EC-3, 09 SEP 2021 to 07 OCT 2021
EC-3, 09 SEP 2021 to 07 OCT 2021