


LURIC EIGHT DEPARTURE (RNAV)

D-ATIS  
124.6  
CLNC DEL  
125.45  
CPDLC  
GND CON  
121.9  
HOBBY TOWER  
118.7 256.9  
HOUSTON DEP CON  
132.25 285.425

**TOP ALTITUDE:  
16000**

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.

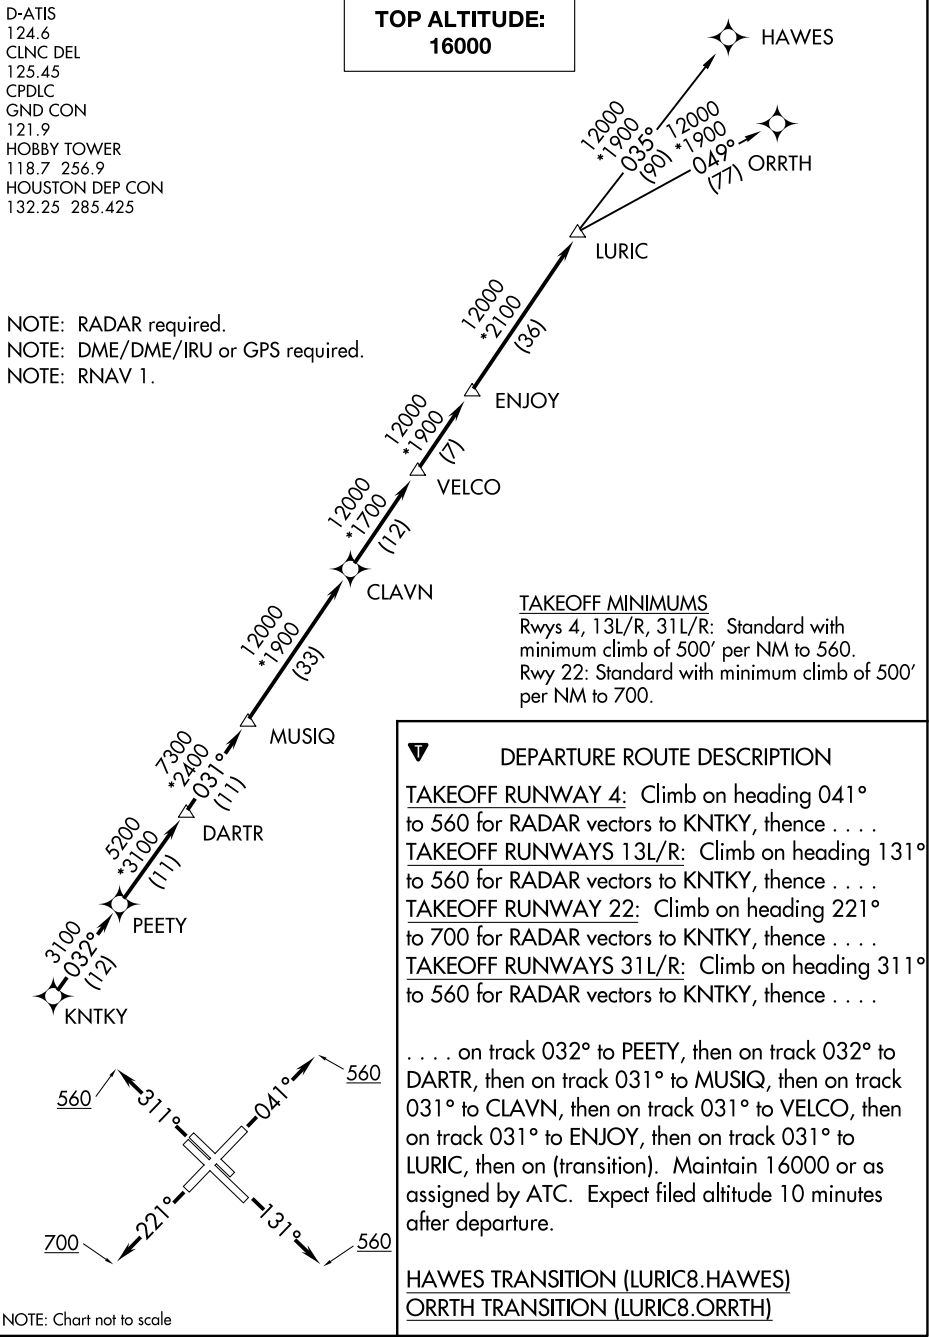

TAKEOFF MINIMUMS

Rwys 4, 13L/R, 31L/R: Standard with minimum climb of 500' per NM to 560.  
Rwy 22: Standard with minimum climb of 500' per NM to 700.

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RUNWAY 4:** Climb on heading 041° to 560 for RADAR vectors to KNTKY, thence . . .  
**TAKEOFF RUNWAYS 13L/R:** Climb on heading 131° to 560 for RADAR vectors to KNTKY, thence . . .  
**TAKEOFF RUNWAY 22:** Climb on heading 221° to 700 for RADAR vectors to KNTKY, thence . . .  
**TAKEOFF RUNWAYS 31L/R:** Climb on heading 311° to 560 for RADAR vectors to KNTKY, thence . . .  
. . . . on track 032° to PEETY, then on track 032° to DARTR, then on track 031° to MUSIQ, then on track 031° to CLAVN, then on track 031° to VELCO, then on track 031° to ENJOY, then on track 031° to LURIC, then on (transition). Maintain 16000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

HAWES TRANSITION (LURIC8.HAWES)  
ORRTH TRANSITION (LURIC8.ORRTH)

NOTE: Chart not to scale

SC-5, 02 DEC 2021 to 30 DEC 2021

SC-5, 02 DEC 2021 to 30 DEC 2021