VORTAC LAL 116.0 Chan 107	APP CRS 256°	Rwy Idg 8499 TDZE 142 Apt Elev 142

VOR RWY 27

LAKELAND LINDER INTL (LAL)

When local altimeter setting not received, use Plant City altimeter setting and increase all MDA 20 feet.
Circling NA to Rwys 8 and 26.

MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 on heading 017° and on LAL VORTAC R-330 to PLUMY INT/PIE 33.4 DME and hold.

ATIS	TAMPA APP CON	LAKELAND TOWER ★	GND CON	UNICOM
118.025	120.65 290.3	122.95 (CTAF) L 236.775	121.4	122.95

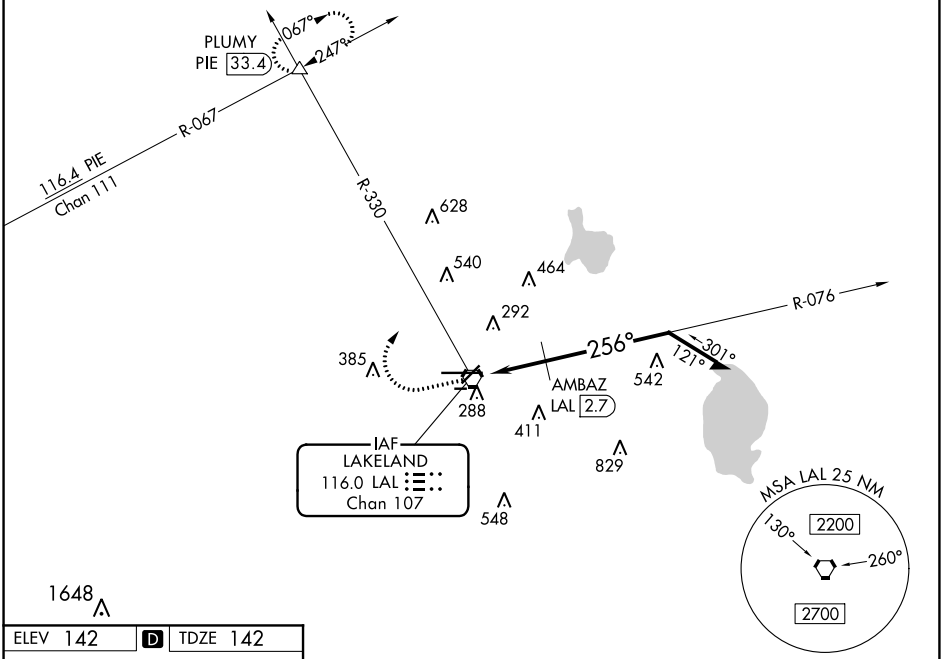

ELEV 142 D TDZE 142



TDZ/CL Rwy 10
HIRL Rwys 5-23 and 10-28 L

1000	2000	LAL R-330	PLUMY
↑	hdg 017°		△

*940 when using Plant City altimeter setting.

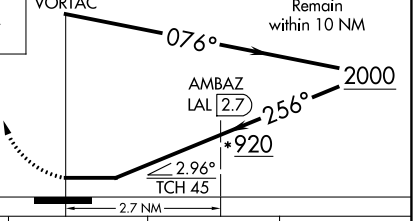

CATEGORY	A	B	C	D
S-27	920-1 778 (800-1)	920-1¼ 778 (800-1¼)	920-2½	778 (800-2½)
CIRCLING	920-1 778 (800-1)	920-1¼ 778 (800-1¼)	920-2½	778 (800-2½)
AMBAZ FIX MINIMUMS				
S-27	540-1	398 (400-1)	540-1⅛	398 (400-1⅛)
CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	720-1½ 578 (600-1½)	840-2¼ 698 (700-2¼)

SE-3, 11 AUG 2022 to 08 SEP 2022
SE-3, 11 AUG 2022 to 08 SEP 2022