


WAAS CH 82203 W29A	APP CRS 303°	Rwy ldg 10996 TDZE 2643 Apt Elev 2643
--	------------------------	--


RNAV (GPS) Z RWY 29R

TUCSON INTL (TUS)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 52°C.		MISSED APPROACH: Climb to 6800 direct WEDGI and track 309° to PIMMA and hold.		
ATIS 123.8 279.65	TUCSON APP CON 119.4 318.1	TUCSON TOWER 118.3 257.8	GND CON 124.4 348.6	CLNC DEL 126.65 326.2

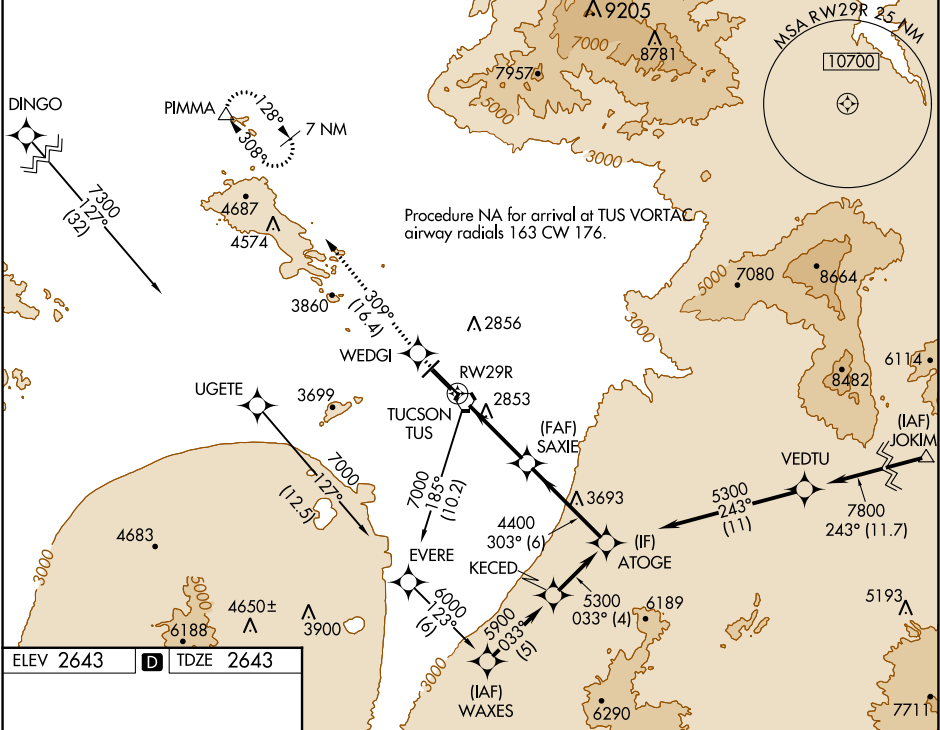

ELEV 2643	D	TDZE 2643
-----------	----------	-----------



HIRL Rwy 11L-29R
MIRL Rwy 3-21 and 11R-29L
REIL Rwy 21, 29L and 29R

6800 WEDGI ▲		tr 309°	PIMMA ▲	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 81).	
*LNAV only		*1.9 NM to RWY29R		SAXIE 4400	
RWY29R		4400		ATOGE 5300	
1.9		3.4 NM		GP 3.00° TCH 53	
CATEGORY	A	B	C	D	E
LPV DA	2929-1 286 (300-1)				
LNAV/VNAV DA	3106-1½ 463 (500-1½)				3106-1¾ 463 (500-1¾)
LNAV MDA	3300-1 657 (700-1)	3300-1½ 657 (700-1½)	3300-2 657 (700-2)	3300-2½ 657 (700-2½)	3300-3 657 (700-3)
CIRCLING	3300-1 657 (700-1)	3300-1½ 657 (700-1½)	3300-2 657 (700-2)	3300-2½ 657 (700-2½)	3300-3 657 (700-3)