


LOC I-FFV	APP CRS	Rwy Idg	7540
111.3	139°	TDZE	23
		Apt Elev	30


ILS or LOC RWY 14
SARASOTA/BRADENTON INTL (SRQ)

DME or RADAR required for LOC only.		MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 on SRQ VOR/DME R-118 to MURDO INT/SRQ 13.6 DME and hold.
When control tower closed, S-ILS 14 Minimums NA; increase S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats visibility to 1 mile. When control tower closed, inop table does not apply to S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats.			

ATIS	TAMPA APP CON	SARASOTA TOWER ★	GND CON	CLNC DEL	UNICOM
124.375	119.65 353.575	120.1(CTAF) 0 256.8	121.9 273.6	118.25	122.95

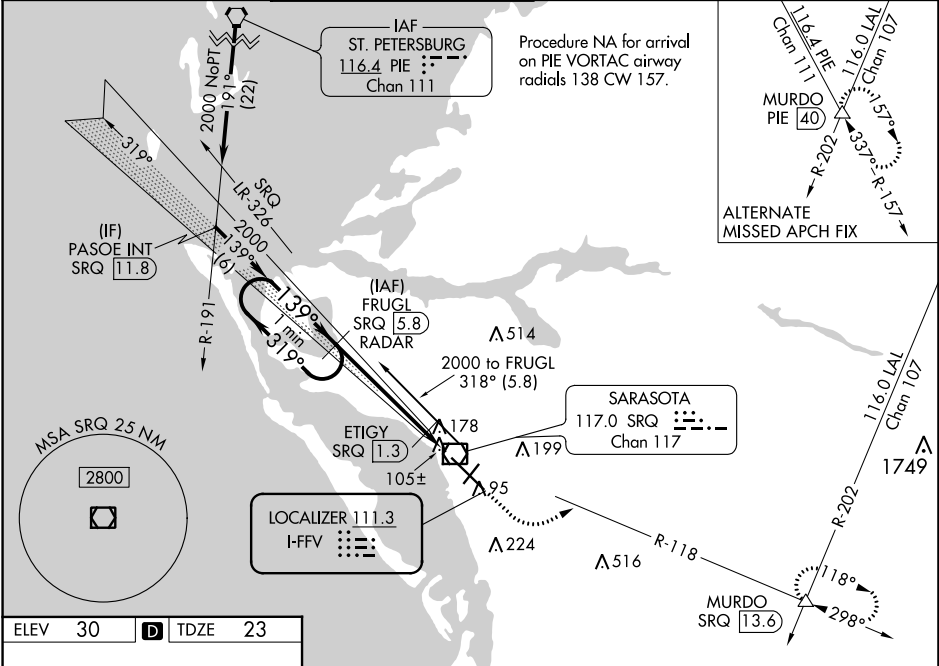

ELEV	30	D	TDZE	23
------	----	---	------	----

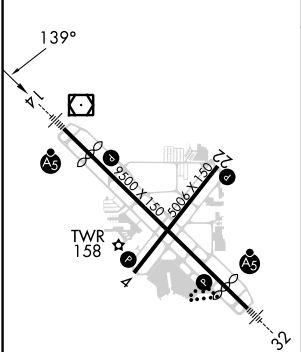

One Minute Holding Pattern		FRUGL SRQ 5.8 RADAR	1000	2000	MURDO
			↑	SRQ R-118	△
			*LOC only.		
2000 ← 319°		2000	2000	ETIGY SRQ 1.3	
GS 3.00°					
TCH 54					
		4.5 NM	1.5 NM		
CATEGORY	A	B	C	D	
S-ILS 14	223-½ 200 (200-½)				
S-LOC 14	500-½	477 (500-½)	500-1	477 (500-1)	
CIRCLING	500-1	470 (500-1)	600-1½	600-2	
ETIGY FIX MINIMUMS					
S-LOC 14	360-½ 337 (400-½)				
CIRCLING	500-1	470 (500-1)	600-1½	600-2	
			570 (600-½)	570 (600-2)	

REIL Rwy 22					
HIRL Rwy 14-32 and 4-22					
FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

SE-3, 26 JAN 2023 to 23 FEB 2023

SE-3, 26 JAN 2023 to 23 FEB 2023