

VORTAC OSH	Rwy Idg	8002
116.75	TDZE	794
Chan 114 (Y)	Apt Elev	808

VOR RWY 18

WITTMAN RGNL (OSH)


⚠

⚠


Circling to Rwy 5, 23, and 31 NA at night. VDP NA with Fond Du Lac County altimeter setting. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase WOMEN fix minimums Circling Cat D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climbing left turn to 3000 on OSH VORTAC R-111 to LEWKO INT/OSH 15.1 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) 290.9	132.3	122.95

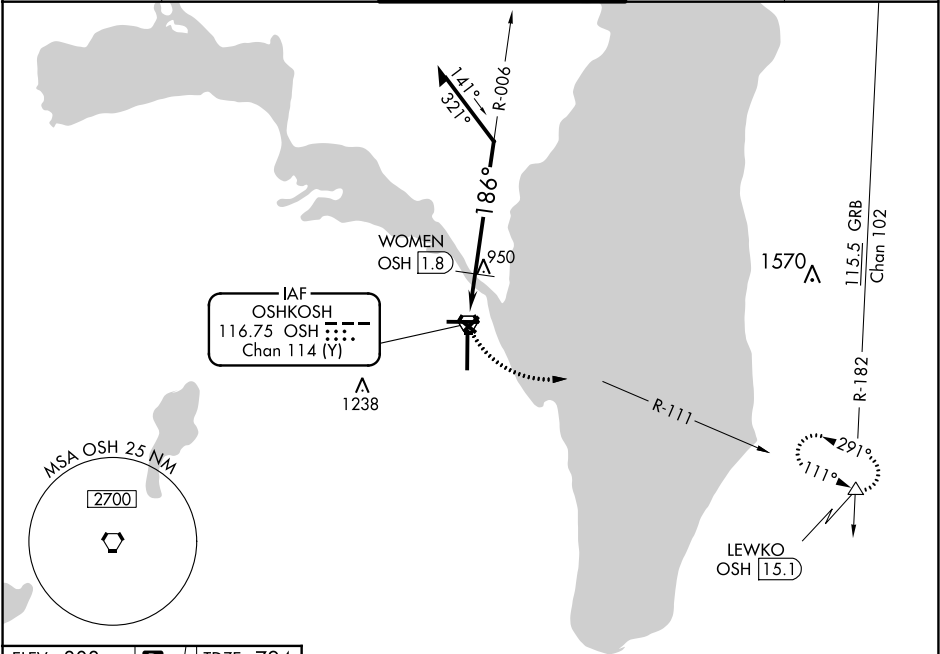

ELEV 808	D	TDZE 794
----------	---	----------

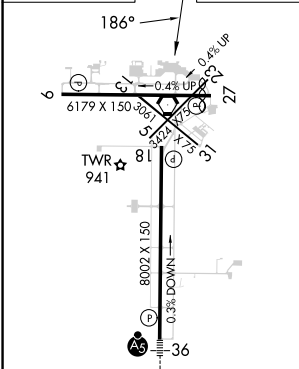

3000

LEWKO

OSH R-111

OSH VORTAC

OSH 1.1

TCH 47

0.2

1.1

0.7 NM

Remain within 10 NM

006°

2600

186°

*1480

2.92°

WOMEN OSH 1.8

*1520 when using Fond Du Lac altimeter setting.

CATEGORY	A	B	C	D
S-18	1480-1 686 (700-1)		1480-2 686 (700-2)	
CIRCLING	1480-1 672 (700-1)		1480-2 672 (700-2)	1480-2¼ 672 (700-2¼)
WOMEN FIX MINIMUMS				
S-18	1260-1 466 (500-1)		1260-1⅜ 466 (500-1⅜)	
CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

REIL Rwy 18 and 27
HIRL Rwy 9-27 and 18-36