

LOC/DME I-FMN	APP CRS	Rwy Idg	6248
111.9	256°	TDZE	5507
Chan 56		Apt Elev	5507


ILS or LOC RWY 25
FOUR CORNERS RGNL (FMN)

DME required.

⚠ VDP N/A with Durango altimeter setting. Circling N/A for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase S-ILS 25 DA to 5950 feet and all visibilities ½ SM; increase all MDAs 260 feet and S-LOC 25 visibility Cat C/D ¾ SM, and Circling visibility Cat B ¼ SM and Cat C ½ SM.

MISSED APPROACH: Climb to 6100 then climbing right turn to 9000 on heading 321° and on RSK VORTAC R-280 to FLUME INT and hold, continue climb-in-hold to 9000.

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER★ 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
----------------	--------------------------------	---	------------------	------------------

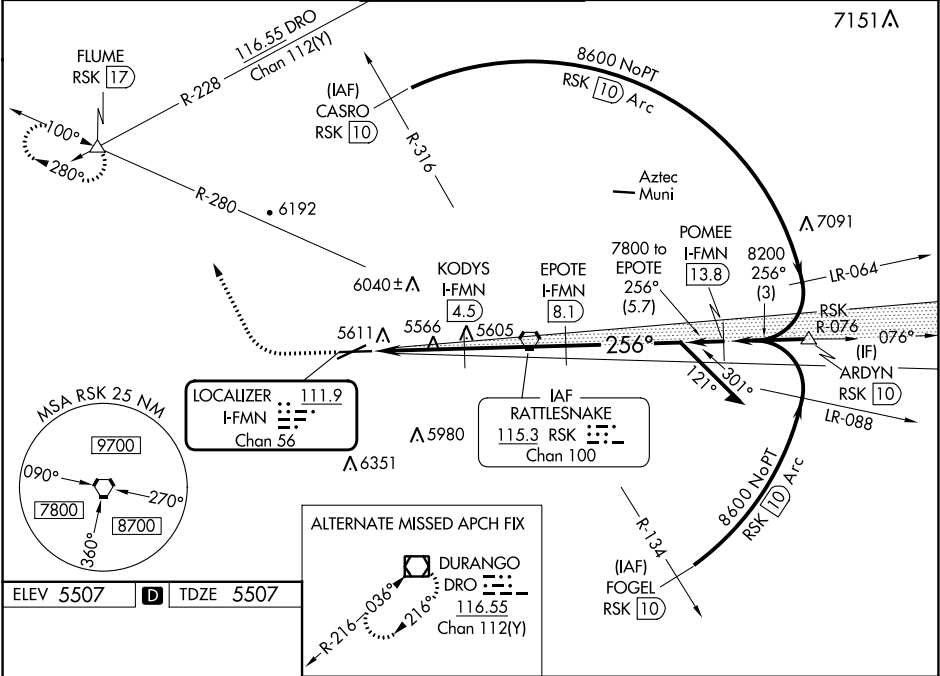

5570 5558 0.4% UP 0.5% UP 6704 X 100 6507 X 150 TWR 5569 256°	6100 9000 hdg 321° RSK R-280 FLUME △	RSK VORTAC EPOTE I-FMN (8.1) 7800 KODYS I-FMN (4.5) 7800 6640 8300 256° 076° 256° GS 3.00° TCH 56			
REIL Rws 23 and 25 MIRL Rws 5-23 and 7-25					
FAF to MAP 7 NM					
Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20
CIRCLING					
S-ILS 25	5707-3/4 200 (200-3/4)				
S-LOC 25	5880-1 373 (400-1)				
6020-1 513 (600-1)	6140-1 633 (700-1)		6380-2 1/2 873 (900-2 1/2)		6400-3 893 (900-3)

SW-1, 30 NOV 2023 to 28 DEC 2023

SW-1, 30 NOV 2023 to 28 DEC 2023