



APP CRS	Rwy Idg	5000
333°	TDZE	999
	Apt Elev	1009

RNAV (GPS) RWY 33

WORCESTER RGNL (ORH)

RNP APCH. When local altimeter setting not received, use Bedford altimeter setting and increase all MDAs 200 feet and visibility LNAV Cat C/D ½ SM and visibility Circling Cat B ¼ SM. VDP NA with Bedford altimeter setting.				MISSED APPROACH: Climbing left turn to 3000 direct GRIPE and hold.		
---	--	--	--	---	--	--

ATIS	BRADLEY APP CON	WORCESTER TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.55	119.0 327.1	120.5 (CTAF) 263.0	123.85	128.65	119.0 (When twr closed)	122.95

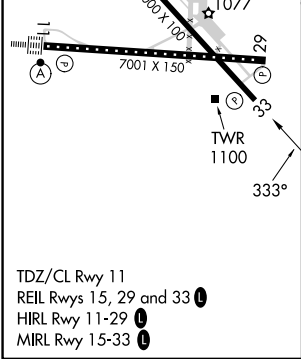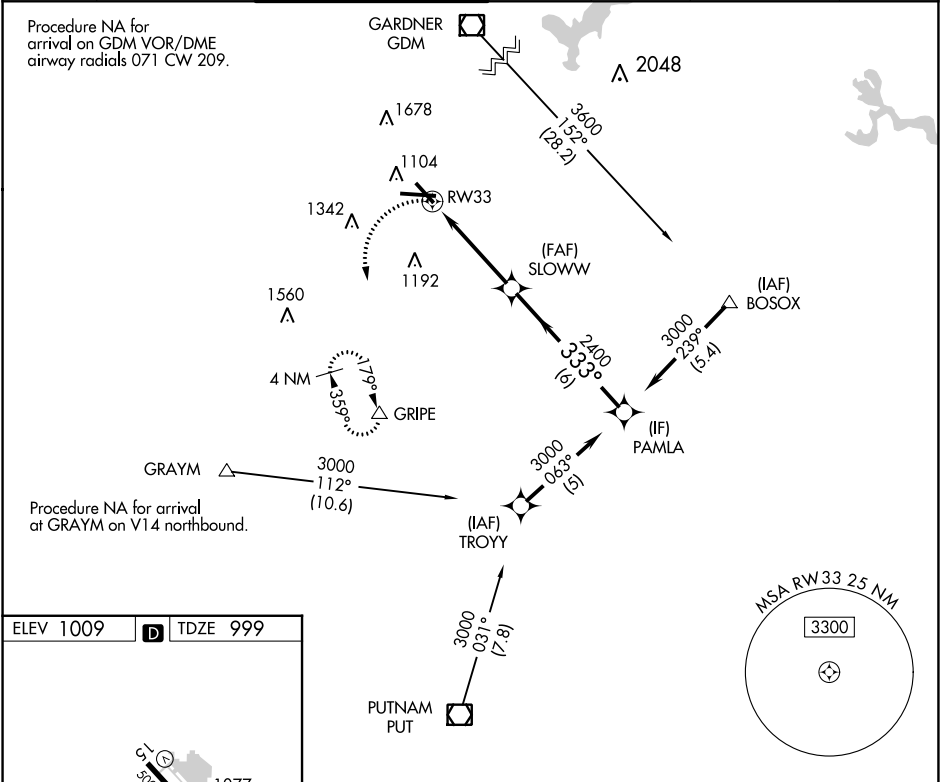

3000 GRIPE		SLOWW		PAMLA		Procedure Turn NA
1.1 NM to RW33		3.03° TCH 40		3000		
1.1		3.1 NM		6 NM		
CATEGORY	A	B	C	D		
LNAV MDA	1480-1	482 (500-1)	1480 -1⅓	482 (500-1⅓)		
CIRCLING	1560-1 551 (600-1)	1720-1 711 (800-1)	2000-3	991 (1000-3)		

NE-1, 21 MAR 2024 to 18 APR 2024

NE-1, 21 MAR 2024 to 18 APR 2024