

ORLANDO, FLORIDA

AL-5793 (FAA)

23334



WAAS CH 42900 W33A	APP CRS 333°	Rwy Idg TDZE Apt Elev 6001 82 82
--	------------------------	--

RNAV (GPS) RWY 33
KISSIMMEE GATEWAY (ISM)

Baro-VNAV NA when using Orlando Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 43°C (109°F). Helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all LPV DA to 359, all LNAV/VNAV DA to 429, and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 540 then climbing left turn to 2000 direct CAMBE and hold.

ATIS 128.775	ORLANDO APP CON 119.4 351.9	KISSIMMEE TOWER ★ 124.45 (CTAF) 0	CLNC DEL 121.7	CLNC DEL 123.95 (when twr closed)	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	--	--------------------------	--	-------------------------	-------------------------

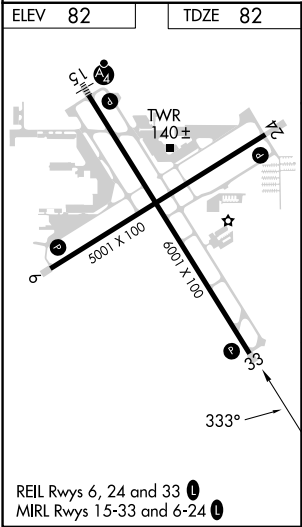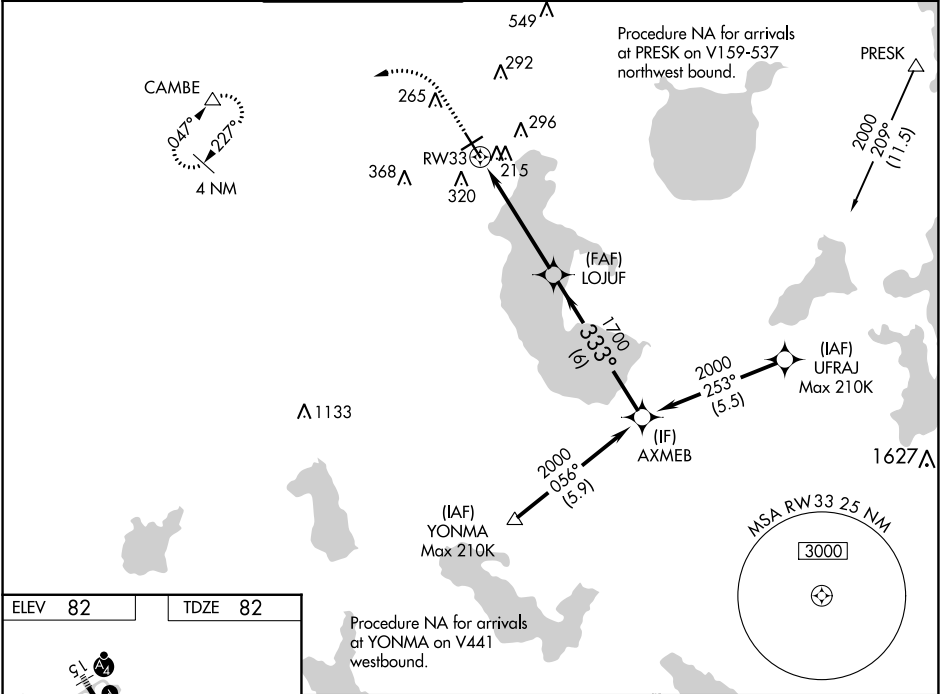

540
↑

2000
↙

CAMBE
△

LOJUF
1700

AXMEB
2000

RW33

GP 3.00°
TCH 45

5 NM

6 NM

333°

1700

CATEGORY	A	B	C	D
LPV DA	332-1 250 (300-1)			
LNAV/ VNAV DA	402-1 320 (400-1)			
LNAV MDA	480-1 398 (400-1)		480-1½ 398 (400-1½)	
CIRCLING	620-1 538 (600-1)		680-1½ 598 (600-1½)	700-2 618 (700-2)

ORLANDO, FLORIDA
Amdt 2C 19MAY22

28°17'N-81°26'W

KISSIMMEE GATEWAY (ISM)
RNAV (GPS) RWY 33

SE-3, 21 MAR 2024 to 18 APR 2024

SE-3, 21 MAR 2024 to 18 APR 2024