

WAAS CH 40199 W32A	APP CRS 317°	Rwy Idg TDZE 24 Apt Elev 30	7701
--	------------------------	---	-------------

RNAV (GPS) Z RWY 32


JACKSONVILLE INTL (JAX)

▼

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct OSBAJ and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC
-------------------------	--	--	-------------------------------	----------------------------------	-------

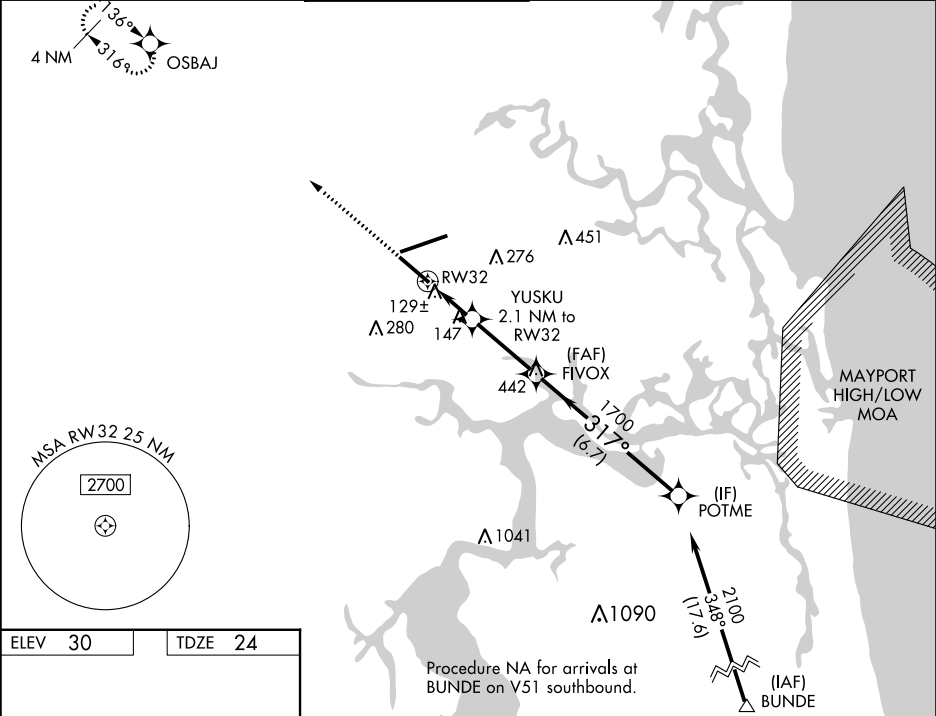

ELEV 30	TDZE 24
---------	---------

REIL Rwy 32
TDZ/CL Rwy 8, 14, and 26
HIRL Rwy 8-26 and 14-32

2000 ↑		OSBAJ 		VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 67).		POTME	
*LNAV only.		*1 NM to RW32		YUSKU 2.1 NM to RW32		FIVOX 1700	
		RW32		740*		2100	
		1 NM		1.1 NM		3 NM	
		A		B		C	
CATEGORY							
LPV DA				336-1 312 (400-1)			
LNAV/ VNAV DA				387-1¼ 363 (400-1¼)			
LNAV MDA				400-1 376 (400-1)			
CIRCLING		520-1 490 (500-1)		580-1½ 550 (600-1½)		640-2 610 (700-2)	
						GP 3.00° TCH 50	