

WAAS CH 42722 W04A	APP CRS 040°	Rwy Idg 7001 TDZE 338 Apt Elev 378
--	------------------------	---

RNAV (GPS) RWY 4

SCHENECTADY COUNTY (SCH)

RNP APCH - GPS.	
-----------------	--


- T** Circling Rwy 10 NA at night. Baro-VNAV and VDP NA when using Albany altimeter setting. Rwy 4 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 621 feet, LNAV/VNAV DA to 638 feet, and increase all MDAs 40 feet. For inop ALTS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats A/B to 1 SM and Cats C/D to 1 ¾ SM. For inop ALTS when using Albany altimeter setting, increase LPV all Cats visibility to ¾ SM, increase LNAV/VNAV all Cats to ¾ SM, increase LNAV Cats A/B visibility to 1 SM, and Cats C/D to 1 ¾ SM.

MALSR



MISSED APPROACH:
Climb to 3000 direct
MULXI and hold.

AWOS-3 119.275	ALBANY APP CON 132.825 263.075	SCHENECTADY TOWER ★ 121.3 (CTAF) 0 321.1	GND CON 121.9	UNICOM 122.95
-------------------	-----------------------------------	---	------------------	------------------

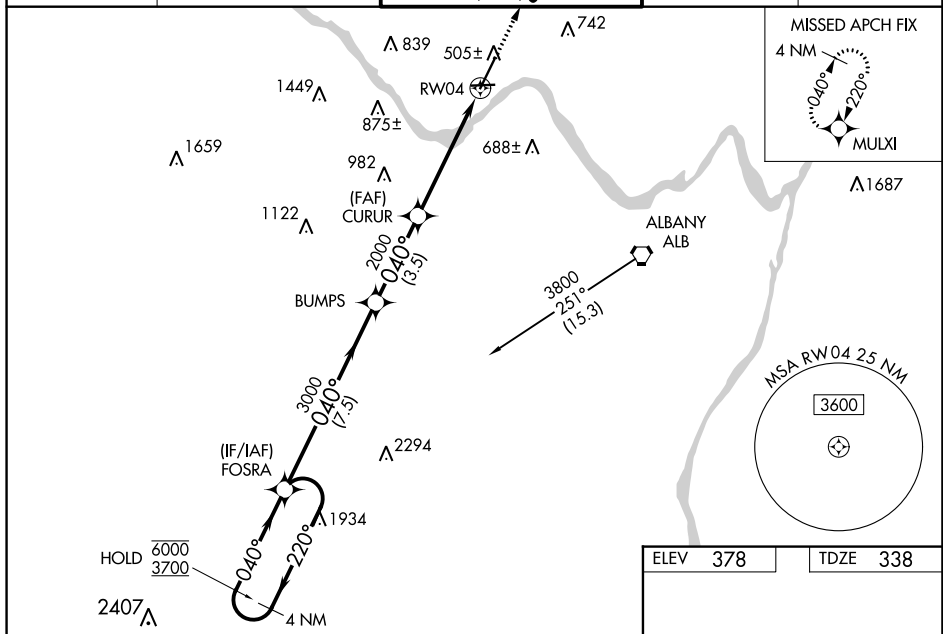

ELEV	378		TDZE	338
------	-----	--	------	-----

